

IN-FINITY 35 RECESSED NO TRIM 4000K GENERAL LIGHTING

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Recessed No Trim |
| Lamps description | Top LED 19,8W/m 2761 lm/m 4000K CRI 80 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |
| Notes | Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps. |



In-Finity 35 Recessed No Trim 4000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |
| Beam angle | 110° |



ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Integral |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class I |



PHYSICAL

| | |
|------------------------------|-----------|
| Recessed depth (mm) | 120 |
| Construction material | Aluminium |

- N35N054G30B 565mm - 712lm White
- N35N084G30B 845mm - 1068lm White
- N35N114G30B 1125mm - 1424lm White
- N35N144G30B 1405mm - 1779lm White
- N35N164G30B 1690mm - 2135lm White
- N35N194G30B 1970mm - 2491lm White
- N35N254G30B 2530mm - 3203lm White
- N35N304G30B 3095mm - 3915lm White
- N35NFC4G30B Flat Corner - 1424lm White
- N35NDC4G30B Dihedral Corner - 1424lm White
- N35NEM4G30B Emergency - 1779lm White

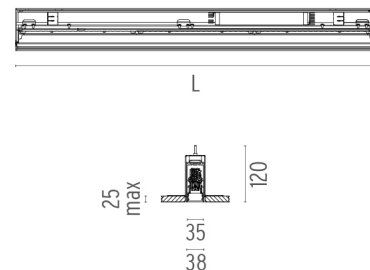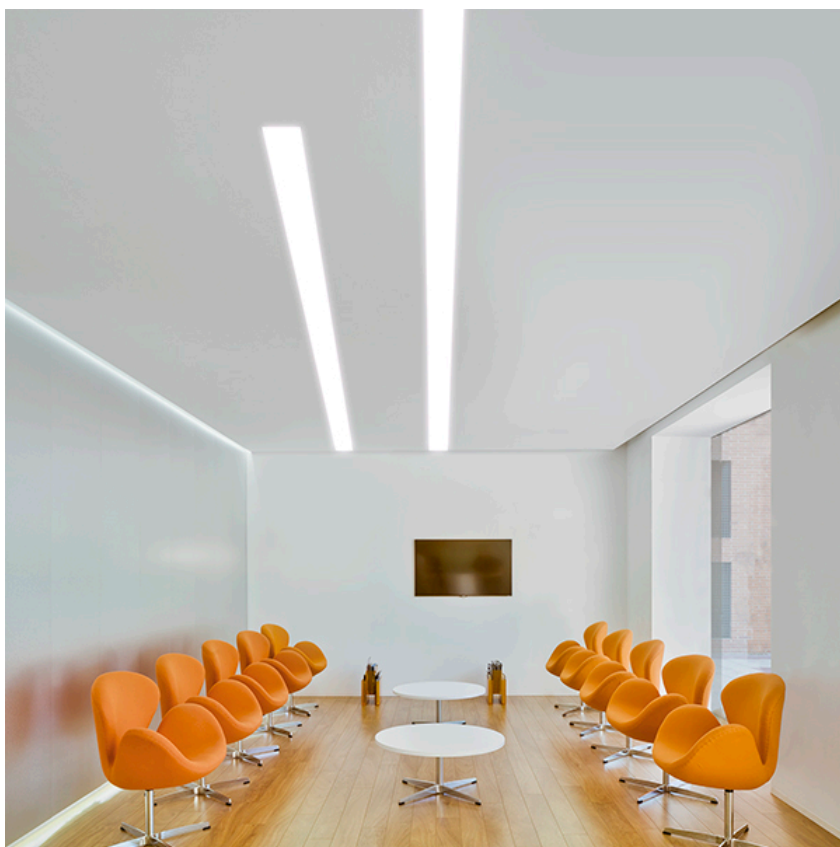

CERTIFICATIONS

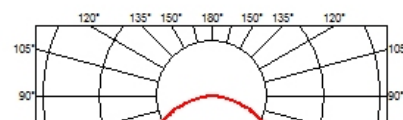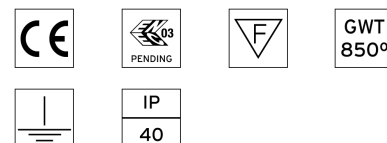

In-Finity 35 Recessed No Trim 4000K General Lighting . Accessories

Structural



08.9050.40

Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 35 Recessed No Trim 4000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 35 Recessed No Trim 4000K General Lighting . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N35N054G30B 565mm - 712lm White
- N35N084G30B 845mm - 1068lm White
- N35N114G30B 1125mm - 1424lm White
- N35N144G30B 1405mm - 1779lm White
- N35N164G30B 1690mm - 2135lm White
- N35N194G30B 1970mm - 2491lm White
- N35N254G30B 2530mm - 3203lm White
- N35N304G30B 3095mm - 3915lm White
- N35NFC4G30B Flat Corner - 1424lm White
- N35NDC4G30B Dihedral Corner - 1424lm White
- N35NEM4G30B Emergency - 1779lm White



CERTIFICATIONS

