

## IN-FINITY 35 RECESSED NO TRIM 4000K GENERAL LIGHTING DALI

<b>Number of heads</b>	1
<b>Mounting</b>	Recessed No Trim
<b>Lamps description</b>	Top LED 19,8W/m 2761 lm/m 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	110°

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

### PHYSICAL

<b>Recessed depth (mm)</b>	120
<b>Construction material</b>	Aluminium





### In-Finity 35 Recessed No Trim 4000K General Lighting Dali



designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N35N054G30BDA 565mm - 712lm White
- N35N084G30BDA 845mm - 1068lm White
- N35N114G30BDA 1125mm - 1424lm White
- N35N144G30BDA 1405mm - 1779lm White
- N35N164G30BDA 1690mm - 2135lm White
- N35N194G30BDA 1970mm - 2491lm White
- N35N254G30BDA 2530mm - 3203lm White
- N35N304G30BDA 3095mm - 3915lm White
- N35NFC4G30BDA Flat Corner - 1424lm White
- N35NDC4G30BDA Dihedral Corner - 1424lm White
- N35NEM4G30BDA Emergency - 1779lm White

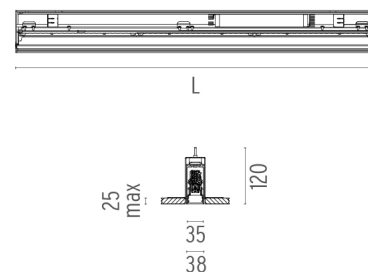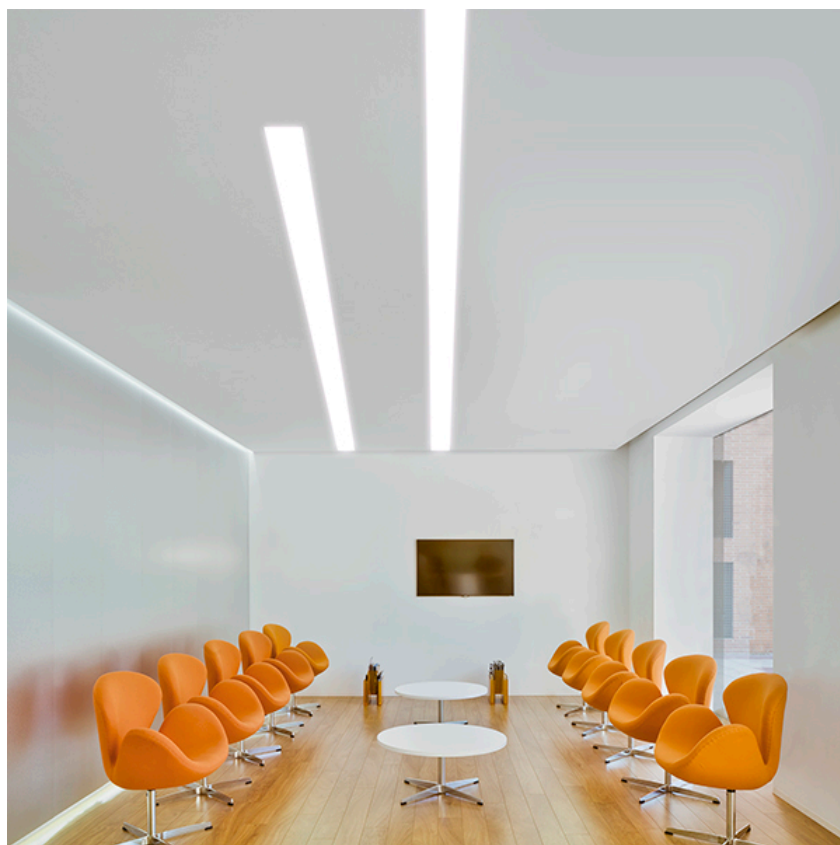

### CERTIFICATIONS

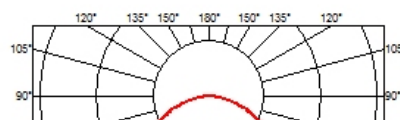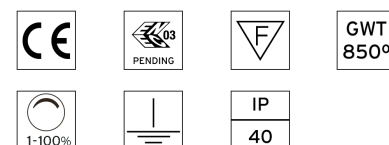

## In-Finity 35 Recessed No Trim 4000K General Lighting Dali . Accessories

### Structural



08.9050.40

#### Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.



### In-Finity 35 Recessed No Trim 4000K General Lighting Dali designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

## In-Finity 35 Recessed No Trim 4000K General Lighting Dali . Lamps



#### Top LED

#### Lamp category:

LED


#### Socket:

Special base

#### Lamp type:

Top LED

- N35N054G30BDA 565mm - 712lm White
- N35N084G30BDA 845mm - 1068lm White
- N35N114G30BDA 1125mm - 1424lm White
- N35N144G30BDA 1405mm - 1779lm White
- N35N164G30BDA 1690mm - 2135lm White
- N35N194G30BDA 1970mm - 2491lm White
- N35N254G30BDA 2530mm - 3203lm White
- N35N304G30BDA 3095mm - 3915lm White
- N35NFC4G30BDA Flat Corner - 1424lm White
- N35NDC4G30BDA Dihedral Corner - 1424lm White
- N35NEM4G30BDA Emergency - 1779lm White



### CERTIFICATIONS

