

## IN-FINITY 35 RECESSED NO TRIM 4000K MICRO-PRISMATIC DIFFUSER

<b>Number of heads</b>	1
<b>Mounting</b>	Recessed No Trim
<b>Lamps description</b>	Top LED 19,8W/m 2761 lm/m 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



### In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	76°



### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I



### PHYSICAL

<b>Recessed depth (mm)</b>	120
<b>Construction material</b>	Aluminium

- N35N054U30B 565mm - 553lm White
- N35N084U30B 845mm - 830lm White
- N35N114U30B 1125mm - 1107lm White
- N35N144U30B 1405mm - 1384lm White
- N35N164U30B 1690mm - 1660lm White
- N35N194U30B 1970mm - 1937lm White
- N35N254U30B 2530mm - 2491lm White
- N35N304U30B 3095mm - 3044lm White
- N35NFC4U30B Flat Corner - 1107lm White
- N35NDC4U30B Dihedral Corner - 1107lm White
- N35NEM4U30B Emergency - 1384lm White

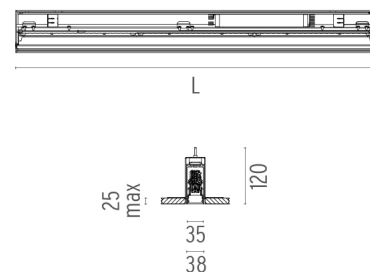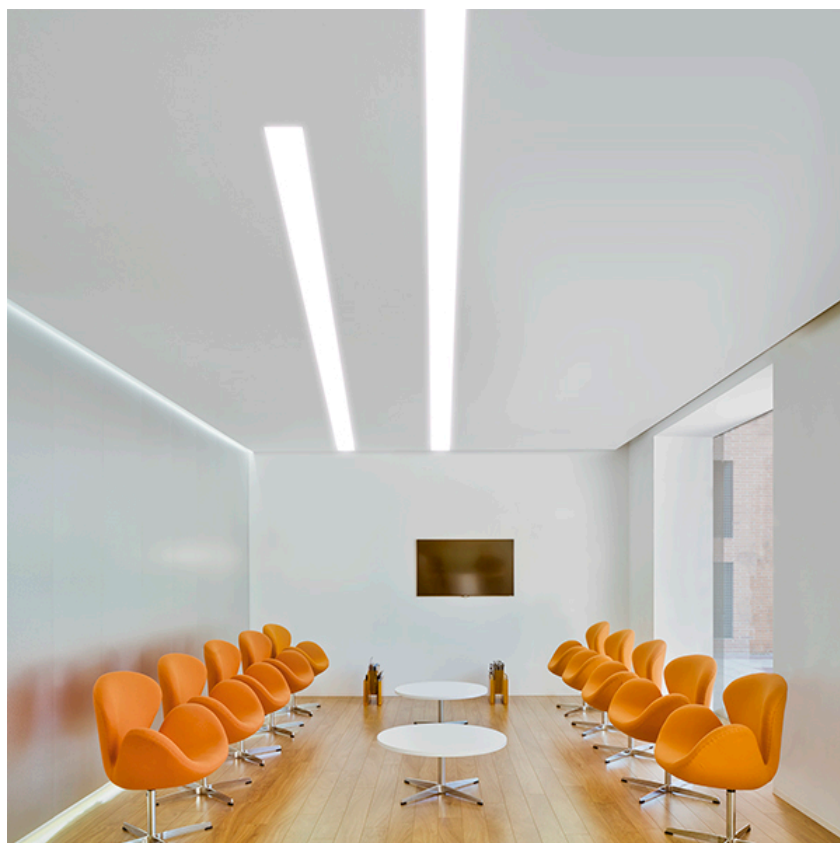

### CERTIFICATIONS

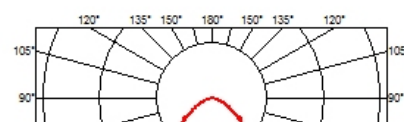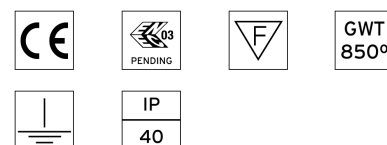

## In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser . Accessories

### Structural



08.9050.40

#### Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.



### In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

## In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser . Lamps



#### Top LED

#### Lamp category:

LED



#### Socket:

Special base

#### Lamp type:

Top LED

- N35N054U30B 565mm - 553lm White
- N35N084U30B 845mm - 830lm White
- N35N114U30B 1125mm - 1107lm White
- N35N144U30B 1405mm - 1384lm White
- N35N164U30B 1690mm - 1660lm White
- N35N194U30B 1970mm - 1937lm White
- N35N254U30B 2530mm - 2491lm White
- N35N304U30B 3095mm - 3044lm White
- N35NFC4U30B Flat Corner - 1107lm White
- N35NDC4U30B Dihedral Corner - 1107lm White
- N35NEM4U30B Emergency - 1384lm White



### CERTIFICATIONS

