

IN-FINITY 35 RECESSED NO TRIM 4000K MICRO-PRISMATIC DIFFUSER DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 19,8W/m 2761 lm/m 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	76°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I

PHYSICAL

Recessed depth (mm)	120
Construction material	Aluminium





In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali



designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N35N054U30BDA 565mm - 553lm White
- N35N084U30BDA 845mm - 830lm White
- N35N114U30BDA 1125mm - 1107lm White
- N35N144U30BDA 1405mm - 1384lm White
- N35N164U30BDA 1690mm - 1660lm White
- N35N194U30BDA 1970mm - 1937lm White
- N35N254U30BDA 2530mm - 2491lm White
- N35N304U30BDA 3095mm - 3044lm White
- N35NFC4U30BDA Flat Corner - 1107lm White
- N35NDC4U30BDA Dihedral Corner - 1107lm White
- N35NEM4U30BDA Emergency - 1384lm White

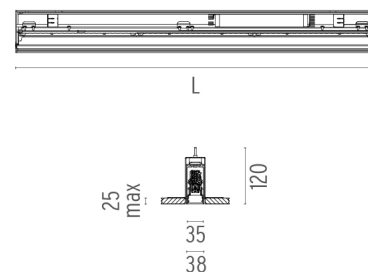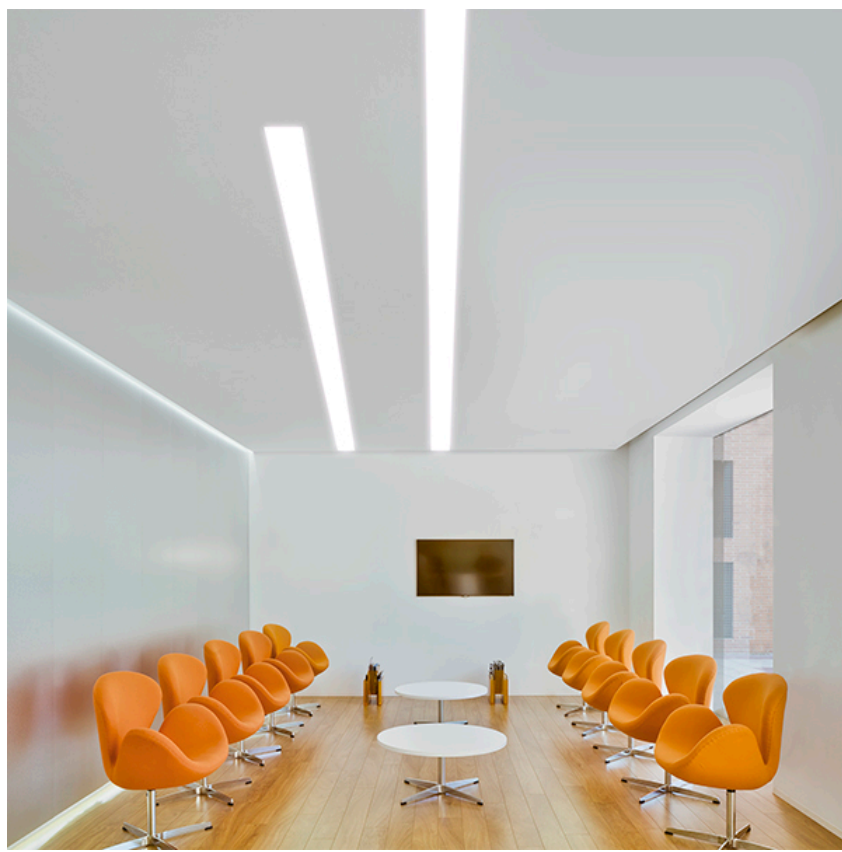

CERTIFICATIONS

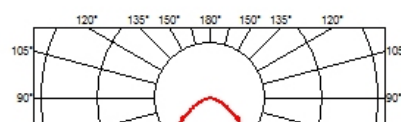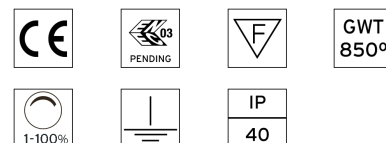

In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali . Accessories

Structural



08.9050.40

Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 35 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali . Lamps



Top LED

Lamp category:

LED


Socket:

Special base

Lamp type:

Top LED

- N35N054U30BDA 565mm - 553lm White
- N35N084U30BDA 845mm - 830lm White
- N35N114U30BDA 1125mm - 1107lm White
- N35N144U30BDA 1405mm - 1384lm White
- N35N164U30BDA 1690mm - 1660lm White
- N35N194U30BDA 1970mm - 1937lm White
- N35N254U30BDA 2530mm - 2491lm White
- N35N304U30BDA 3095mm - 3044lm White
- N35NFC4U30BDA Flat Corner - 1107lm White
- N35NDC4U30BDA Dihedral Corner - 1107lm White
- N35NEM4U30BDA Emergency - 1384lm White



CERTIFICATIONS

