


IN-FINITY 70 RECESSED NO TRIM 3000K GENERAL LIGHTING DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 23,1W/m 2877 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 70 Recessed No Trim 3000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	103°



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium

- N70N053G30BDA 565mm - 1262lm White
- N70N083G30BDA 845mm - 1893lm White
- N70N113G30BDA 1125mm - 2524lm White
- N70N143G30BDA 1405mm - 3155lm White
- N70N163G30BDA 1690mm - 3786lm White
- N70N193G30BDA 1970mm - 4417lm White
- N70N253G30BDA 2530mm - 5680lm White
- N70N303G30BDA 3095mm - 6942lm White
- N70NFC3G30BDA Flat Corner - 2524lm White
- N70NDC3G30BDA Dihedral Corner - 2524lm White
- N70NEM3G30BDA Emergency - 3155lm White



CERTIFICATIONS

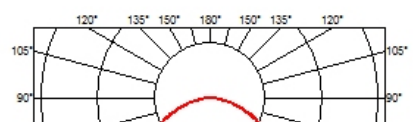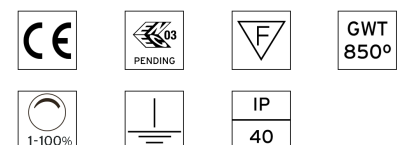

In-Finity 70 Recessed No Trim 3000K General Lighting Dali . Accessories

Structural



08.9052.40

Metal cover. Recessed No Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.

In-Finity 70 Recessed No Trim 3000K General Lighting Dali . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Top LED





In-Finity 70 Recessed No Trim 3000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N70N053G30BDA 565mm - 1262lm White
- N70N083G30BDA 845mm - 1893lm White
- N70N113G30BDA 1125mm - 2524lm White
- N70N143G30BDA 1405mm - 3155lm White
- N70N163G30BDA 1690mm - 3786lm White
- N70N193G30BDA 1970mm - 4417lm White
- N70N253G30BDA 2530mm - 5680lm White
- N70N303G30BDA 3095mm - 6942lm White
- N70NFC3G30BDA Flat Corner - 2524lm White
- N70NDC3G30BDA Dihedral Corner - 2524lm White
- N70NEM3G30BDA Emergency - 3155lm White



CERTIFICATIONS

