


IN-FINITY 70 RECESSED NO TRIM 3000K MICRO-PRISMATIC DIFFUSER DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 23,1W/m 2877 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

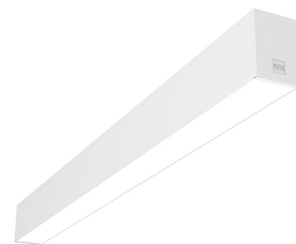

In-Finity 70 Recessed No Trim 3000K Micro-Prismatic Diffuser Dali

designed by FLOS Architectural

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	72°

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I


- N70N053U30BDA 565mm - 755lm White
- N70N083U30BDA 845mm - 1133lm White
- N70N113U30BDA 1125mm - 1511lm White
- N70N143U30BDA 1405mm - 1888lm White
- N70N163U30BDA 1690mm - 2266lm White
- N70N193U30BDA 1970mm - 2644lm White
- N70N253U30BDA 2530mm - 3399lm White
- N70N303U30BDA 3095mm - 4154lm White
- N70NFC3U30BDA Flat Corner - 1511lm White
- N70NDC3U30BDA Dihedral Corner - 1511lm White
- N70NEM3U30BDA Emergency - 1888lm White

PHYSICAL



Recessed depth (mm)	135
Construction material	Aluminium



L



CERTIFICATIONS

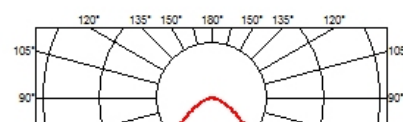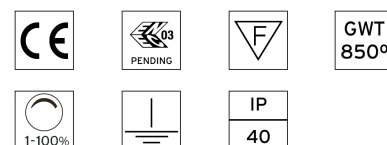

In-Finity 70 Recessed No Trim 3000K Micro-Prismatic Diffuser Dali . Accessories


Structural



08.9052.40

Metal cover. Recessed No Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 70 Recessed No Trim 3000K Micro-Prismatic Diffuser Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 70 Recessed No Trim 3000K Micro-Prismatic Diffuser Dali . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N70N053U30BDA 565mm - 755lm White
- N70N083U30BDA 845mm - 1133lm White
- N70N113U30BDA 1125mm - 1511lm White
- N70N143U30BDA 1405mm - 1888lm White
- N70N163U30BDA 1690mm - 2266lm White
- N70N193U30BDA 1970mm - 2644lm White
- N70N253U30BDA 2530mm - 3399lm White
- N70N303U30BDA 3095mm - 4154lm White
- N70NFC3U30BDA Flat Corner - 1511lm White
- N70NDC3U30BDA Dihedral Corner - 1511lm White
- N70NEM3U30BDA Emergency - 1888lm White



CERTIFICATIONS

