


## IN-FINITY 70 RECESSED NO TRIM 4000K GENERAL LIGHTING DALI

<b>Number of heads</b>	1
<b>Mounting</b>	Recessed No Trim
<b>Lamps description</b>	Top LED 23,1W/m 3091 lm/m 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



**In-Finity 70 Recessed No Trim 4000K General Lighting DALI**  
designed by FLOS Architectural

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	103°

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.



### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I



- N70N054G30BDA 565mm - 1367lm White
- N70N084G30BDA 845mm - 2050lm White
- N70N114G30BDA 1125mm - 2733lm White
- N70N144G30BDA 1405mm - 3416lm White
- N70N164G30BDA 1690mm - 4100lm White
- N70N194G30BDA 1970mm - 4783lm White
- N70N254G30BDA 2530mm - 6149lm White
- N70N304G30BDA 3095mm - 7516lm White
- N70NFC4G30BDA Flat Corner - 2733lm White
- N70NDC4G30BDA Dihedral Corner - 2733lm White
- N70NEM4G30BDA Emergency - 3416lm White

### PHYSICAL

<b>Recessed depth (mm)</b>	135
<b>Construction material</b>	Aluminium



### CERTIFICATIONS

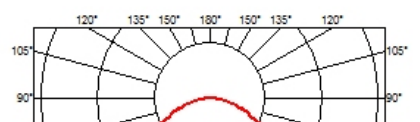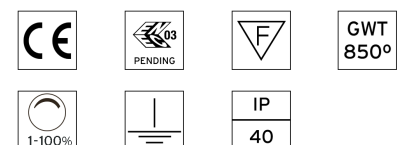

## In-Finity 70 Recessed No Trim 4000K General Lighting Dali . Accessories

### Structural



08.9052.40

#### Metal cover. Recessed No Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.

## In-Finity 70 Recessed No Trim 4000K General Lighting Dali . Lamps



#### Top LED

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

Top LED





### In-Finity 70 Recessed No Trim 4000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N70N054G30BDA 565mm - 1367lm White
- N70N084G30BDA 845mm - 2050lm White
- N70N114G30BDA 1125mm - 2733lm White
- N70N144G30BDA 1405mm - 3416lm White
- N70N164G30BDA 1690mm - 4100lm White
- N70N194G30BDA 1970mm - 4783lm White
- N70N254G30BDA 2530mm - 6149lm White
- N70N304G30BDA 3095mm - 7516lm White
- N70NFC4G30BDA Flat Corner - 2733lm White
- N70NDC4G30BDA Dihedral Corner - 2733lm White
- N70NEM4G30BDA Emergency - 3416lm White



### CERTIFICATIONS

