


IN-FINITY 70 RECESSED NO TRIM 4000K MICRO-PRISMATIC DIFFUSER DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 23,1W/m 3091 lm/m 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

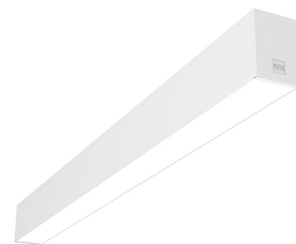

In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	72°



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium

- N70N054U30BDA 565mm - 818lm White
- N70N084U30BDA 845mm - 1227lm White
- N70N114U30BDA 1125mm - 1636lm White
- N70N144U30BDA 1405mm - 2045lm White
- N70N164U30BDA 1690mm - 2454lm White
- N70N194U30BDA 1970mm - 2862lm White
- N70N254U30BDA 2530mm - 3680lm White
- N70N304U30BDA 3095mm - 4498lm White
- N70NFC4U30BDA Flat Corner - 1636lm White
- N70NDC4U30BDA Dihedral Corner - 1636lm White
- N70NEM4U30BDA Emergency - 2045lm White



CERTIFICATIONS

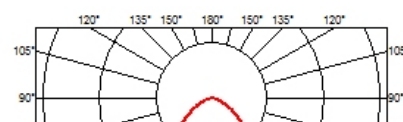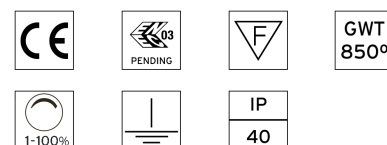

In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali . Accessories


Structural



08.9052.40

Metal cover. Recessed No Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 70 Recessed No Trim 4000K Micro-Prismatic Diffuser Dali . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N70N054U30BDA 565mm - 818lm White
- N70N084U30BDA 845mm - 1227lm White
- N70N114U30BDA 1125mm - 1636lm White
- N70N144U30BDA 1405mm - 2045lm White
- N70N164U30BDA 1690mm - 2454lm White
- N70N194U30BDA 1970mm - 2862lm White
- N70N254U30BDA 2530mm - 3680lm White
- N70N304U30BDA 3095mm - 4498lm White
- N70NFC4U30BDA Flat Corner - 1636lm White
- N70NDC4U30BDA Dihedral Corner - 1636lm White
- N70NEM4U30BDA Emergency - 2045lm White



CERTIFICATIONS

