

### IN-FINITY 70 RECESSED TRIM 3000K MICRO-PRISMATIC DIFFUSER

Number of heads

Mounting Recessed Trim

Lamps description Top LED 23,1W/m 2877 lm/m 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

Notes Micro-Prismatic Diffuser: Highly efficient multilayer

diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a

configuration without end caps.

#### **OPTICAL**

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 72°


#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

# **PHYSICAL**

Recessed depth (mm) 135

Construction material Aluminium

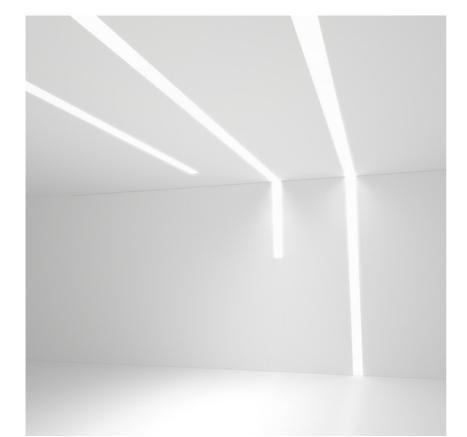



## In-Finity 70 Recessed Trim 3000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

N70T053U30B 565mm - 755lm White

N70T053U02B 565mm - 755lm Anodized Grey

N70T053U14B 565mm - 755lm Black

N70T083U30B 845mm - I133lm White
N70T083U02B 845mm - I133lm Anodized Grey

N70T083U14B 845mm - 1133lm Black

N70T113U30B 1125mm - 1511lm White

N70T113U02B 1125mm - 1511lm Anodized Grey

N70T113U14B 1125mm - 1511lm Black

N70T143U30B 1405mm - 1888lm White

N70T143U02B 1405mm - 1888lm Anodized Grey

N70T143U14B 1405mm - 1888lm Black

N70T163U30B 1690mm - 2266lm White

N70T163U02B 1690mm - 2266lm Anodized Grey

N70T163U14B 1690mm - 2266lm Black

N70T193U30B 1970mm - 2644lm White

N70T193U02B 1970mm - 2644lm Anodized Grey

N70T193U14B 1970mm - 2644lm Black

N70T253U30B 2530mm - 3399lm White

N70T253U02B 2530mm - 3399lm Anodized Grey

N70T253U14B 2530mm - 3399lm Black

N70T303U30B 3095mm - 4154lm White

N70T303U02B 3095mm - 4154lm Anodized Grey

N70T303U14B 3095mm - 4154lm Black

N70TFC3U30B Flat Corner - 1511lm White

N70TFC3U02B Flat Corner - 1511Im Anodized Grey

N70TFC3U14B Flat Corner - 1511Im Black

N70TDC3U30B Dihedral Corner - White

N70TDC3U02B Dihedral Corner - Anodized Grey

N70TDC3UI4B Dihedral Corner - Black

N70TEM3U30B Emergency - 1888lm White

N70TEM3U02B Emergency - 1888Im Anodized Grey

N70TEM3U14B Emergency - 1888lm Black

www.flos.com



## In-Finity 70 Recessed Trim 3000K Micro-Prismatic Diffuser . Accessories

#### **Structural**



08.9053.40

08.9053.02

08.9053.NS

Metal cover. Recessed Trim. 70 mm

Metal cover for the different profiles. 2 unit kit.

# In-Finity 70 Recessed Trim 3000K Micro-Prismatic Diffuser . Lamps



**Top LED** 

Lamp category:

**LED** 

Socket:

Special base

Lamp type:

Top LED



# In-Finity 70 Recessed Trim 3000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

N70T053U30B 565mm - 755lm White

N70T053U02B 565mm - 755lm Anodized Grey

N70T053U14B 565mm - 755lm Black

N70T083U30B 845mm - I I 33lm White

N70T083U02B 845mm - I I 33lm Anodized Grey

N70T083U14B 845mm - 1133lm Black

N70T113U30B 1125mm - 1511lm White

N70T113U02B 1125mm - 1511lm Anodized Grey

N70T113U14B 1125mm - 1511lm Black

N70T143U30B 1405mm - 1888lm White

N70T143U02B 1405mm - 1888lm Anodized Grey

N70T143U14B 1405mm - 1888lm Black

N70T163U30B 1690mm - 2266lm White

N70T163U02B 1690mm - 2266lm Anodized Grey

N70T163U14B 1690mm - 2266lm Black

N70T193U30B 1970mm - 2644lm White

N70T193U02B 1970mm - 2644lm Anodized Grey

N70T193U14B 1970mm - 2644lm Black

N70T253U30B 2530mm - 3399lm White

N70T253U02B 2530mm - 3399lm Anodized Grey

N70T253U14B 2530mm - 3399lm Black

N70T303U30B 3095mm - 4154lm White

N70T303U02B 3095mm - 4154lm Anodized Grey

N70T303U14B 3095mm - 4154lm Black

N70TFC3U30B Flat Corner - 1511lm White

N70TFC3U02B Flat Corner - 1511Im Anodized Grey

N70TFC3U14B Flat Corner - 1511Im Black

N70TDC3U30B Dihedral Corner - White

N70TDC3U02B Dihedral Corner - Anodized Grey

N70TDC3UI4B Dihedral Corner - Black

N70TEM3U30B Emergency - 1888Im White

N70TEM3U02B Emergency - 1888Im Anodized Grey

N70TEM3U14B Emergency - 1888lm Black

www.flos.com