# FLOS

## **IN-FINITY 70 RECESSED TRIM 4000K MICRO-PRISMATIC DIFFUSER**

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes I Recessed Trim Top LED 23, IW/m 3091 lm/m 4000K CRI 80 See reference number 220/240 Indoor Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

## OPTICAL

Aiming Light distribution symmetry Beam angle

# ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

#### PHYSICAL

Recessed depth (mm) Construction material 135 Aluminium

Fixed

72°


Symmetric

Included

Integral

Class I

Electronic Without

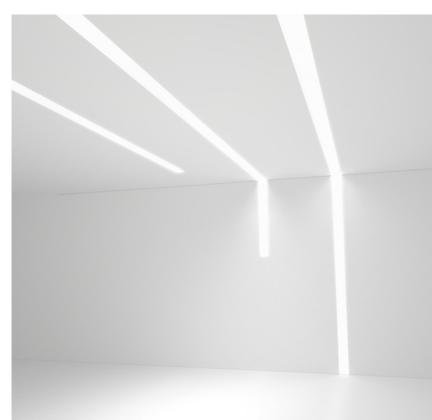



# In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

N70T054U30B 565mm - 818lm White
N70T054U02B 565mm - 818lm Anodized Grey
N70T054U14B 565mm - 818lm Black
N70T084U30B 845mm - 1227lm White
N70T084U02B 845mm - 1227lm Anodized Grey
N70T084U14B 845mm - 12271m Black
N70T114U30B 1125mm - 1636lm White
N70T114U02B 1125mm - 1636lm Anodized Grey
N70T114U14B 1125mm - 1636lm Black
N70T144U30B 1405mm - 2045Im White
N70T144U02B 1405mm - 2045Im Anodized Grey
N70T144U14B 1405mm - 2045Im Black
N70T164U30B 1690mm - 2454lm White
N70T164U02B 1690mm - 2454lm Anodized Grey
N70T164U14B 1690mm - 2454lm Black
N70T194U30B 1970mm - 2862lm White
N70T194U02B 1970mm - 2862lm Anodized Grey
N70T194U14B 1970mm - 2862lm Black
N70T254U30B 2530mm - 3680lm White
N70T254U02B 2530mm - 3680lm Anodized Grey
N70T254U14B 2530mm - 3680Im Black
N70T304U30B 3095mm - 4498lm White
N70T304U02B 3095mm - 4498Im Anodized Grey
N70T304U14B 3095mm - 4498Im Black
N70TFC4U30B Flat Corner - 1636lm White
N70TFC4U02B Flat Corner - 1636Im Anodized Grey
N70TFC4U14B Flat Corner - 1636Im Black
N70TDC4U30B Dihedral Corner - White
N70TDC4U02B Dihedral Corner - Anodized Grey
N70TDC4U14B Dihedral Corner - Black
N70TEM4U30B Emergency - 2045lm White
N70TEM4U02B Emergency - 2045Im Anodized Grey
N70TEM4U14B Emergency - 2045Im Black

# FLOS

### In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser . Accessories

#### Structural



Metal cover. Recessed Trim. 70 mm Metal cover for the different profiles. 2 unit kit.

In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser . Lamps



Top LED Lamp category: LED Socket: Special base Lamp type: Top LED



In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

N70	T054U30B 565mm - 818lm	White
N70	T054U02B 565mm - 818lm	Anodized Grey
N70	T054U14B 565mm - 818lm	Black
N70	T084U30B 845mm - 1227lm	White
N70	T084U02B 845mm - 1227Im	Anodized Grey
• N70	T084U14B 845mm - 1227Im	Black
N701	T114U30B 1125mm - 1636lm	White
N701	T114U02B 1125mm - 1636lm	Anodized Grey
N701	TI 14U 14B 1 125mm - 1636lm	Black
N701	T144U30B 1405mm - 2045lm	White
N701	T144U02B 1405mm - 2045lm	Anodized Grey
N701	T144U14B 1405mm - 2045lm	Black
N701	T164U30B 1690mm - 2454lm	White
N701	T164U02B 1690mm - 2454lm	Anodized Grey
<b>N70</b>	T164U14B 1690mm - 2454lm	Black
N701	T194U30B 1970mm - 2862lm	White
N701	T194U02B 1970mm - 2862lm	Anodized Grey
N701	T194U14B 1970mm - 2862lm	Black
N701	T254U30B 2530mm - 3680lm	White
N701	T254U02B 2530mm - 3680lm	Anodized Grey
<b>N70</b>	T254U14B 2530mm - 3680lm	Black
N701	T304U30B 3095mm - 4498lm	White
N701	T304U02B 3095mm - 4498lm	Anodized Grey
<b>N70</b>	T304U14B 3095mm - 4498lm	Black
N70T	FC4U30B Flat Corner - 1636lm	White
N70T	FC4U02B Flat Corner - 1636lm	Anodized Grey
<b>N70</b> T	FC4U14B Flat Corner - 1636lm	Black
N70T	DC4U30B Dihedral Corner - m	White
	DC4U02B Dihedral Corner -	Anodized Grey
N70T	DC4U14B Dihedral Corner - m	Black
N70T	EM4U30B Emergency - 2045lm	White
N70T	EM4U02B Emergency - 2045Im	Anodized Grey
N70T	EM4U14B Emergency - 2045lm	Black

www.flos.com