

FLOS

USO 1700 COVE LIGHTING

| | |
|--------------------------|---|
| Lamps description | Cold Cathode 161W (4 x 40W) 13824 lm 3000K CRI 85 |
| Environment | Indoor |
| Notes | Delivered in two pieces. |

OPTICAL

| | |
|------------------------------------|--------|
| Aiming | Fixed |
| Light distribution symmetry | Direct |

ELECTRICAL

| | |
|----------------------------------|------------|
| Control gear availability | Included |
| Control gear type | Electronic |
| Emergency | Without |
| Insulation class | Class I |

PHYSICAL


| | |
|--------------------|-----|
| Weight (kg) | 100 |
|--------------------|-----|



USO 1700 Cove Lighting designed by FLOS Soft Architecture

Recessed ceiling luminaire. Direct lighting with cold cathode lamps.

● SA.1007.4.300 Raw

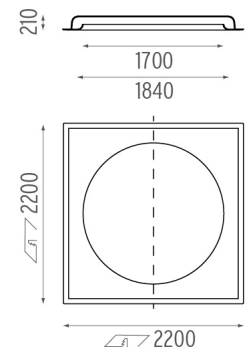

CERTIFICATIONS



USO 1700 Cove Lighting . Lamps



Cold Cathode 40W

Lamp Watt:
40 W

Lamp category:
Fluorescent tube

Color temperature (K):
3000 °K


Lamp type:
Cold Cathode



USO 1700 Cove Lighting designed by FLOS Soft Architecture

Recessed ceiling luminaire. Direct lighting with cold cathode lamps.

● SA.1007.4.300 Raw



CERTIFICATIONS

