

## USO 2200 COVE LIGHTING DIMMABLE DALI

|                          |                             |
|--------------------------|-----------------------------|
| <b>Lamps description</b> | 8 8 x T5 FH G5 28W 20800 lm |
| <b>Environment</b>       | Indoor                      |
| <b>Notes</b>             | Delivered in two pieces.    |

### OPTICAL

|                                    |        |
|------------------------------------|--------|
| <b>Aiming</b>                      | Fixed  |
| <b>Light distribution symmetry</b> | Direct |

### ELECTRICAL

|                                  |                                |
|----------------------------------|--------------------------------|
| <b>Control gear availability</b> | Included                       |
| <b>Control gear type</b>         | Electronic dimmable Dsi & dali |
| <b>Emergency</b>                 | Without                        |
| <b>Insulation class</b>          | Class I                        |

### PHYSICAL


|                    |     |
|--------------------|-----|
| <b>Weight (kg)</b> | 165 |
|--------------------|-----|



**USO 2200 Cove Lighting Dimmable Dali**  
designed by FLOS Soft Architecture

Recessed ceiling luminaire. Direct lighting with fluorescent.

● SA.1008.4.IDA Raw

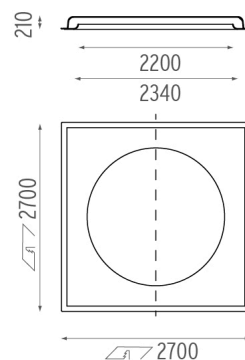

### CERTIFICATIONS



## USO 2200 Cove Lighting Dimmable Dali . Lamps



FH

### T5 FH 28W G5

**Lamp Watt:**  
28 W

**Lamp category:**  
Fluorescent tube

**Socket:**  
G5


**Lamp type:**  
T5 FH



**USO 2200 Cove Lighting Dimmable Dali**  
designed by FLOS Soft Architecture

Recessed ceiling luminaire. Direct  
lighting with fluorescent.

● SA.I008.4.IDA Raw

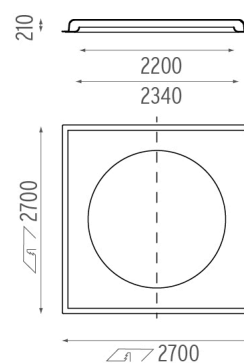

### CERTIFICATIONS

