

## SOFT PLATE 3L + JUNCO 250 MM

<b>Mounting</b>	Junco 250 mm 2700K
<b>Lamps description</b>	Power LED DC 700 mA 2,1W 182 lm 2700K CRI 90
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-wired product for serial connection to constant current. Recommended power supply: 60.8655.



### ELECTRICAL





<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III


### Soft Plate 3L + Junco 250 mm designed by FLOS Soft Architecture

Semi-recessed LED luminaire for indoor applications. Seamless integration in the architectural environment by Soft Architecture technology. Power supply not included.


### PHYSICAL

<b>Length (mm)</b>	400
<b>Width (mm)</b>	300
<b>Weight (kg)</b>	Soft Plate: 2,90 / Junco: 0,13

	SA.5201.5.120 Soft Plate	White
	08.8595.40A Junco 250 mm 2700K	White
	08.8595.06A Junco 250 mm 2700K	Chrome
	08.8595.AAA Junco 250 mm 2700K	Black



### CERTIFICATIONS

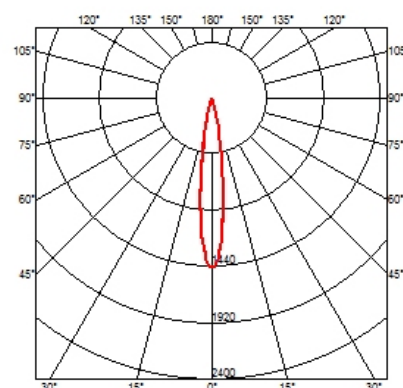

## Soft Plate 3L + Junco 250 mm . Accessories

### Power Supply



60.8655

**Not dimmable continuous current power supply of 17W**

Not dimmable continuous current power supply of 17W, 700mA - 100/240V - 50/60Hz.

60.8533


**Continuous current power supply of 25W**

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/ 500/700mA 1-10V switch or push dimming.

**Soft Plate 3L + Junco 250 mm**  
designed by FLOS Soft Architecture

Semi-recessed LED luminaire for indoor applications. Seamless integration in the architectural environment by Soft Architecture technology. Power supply not included.

-  SA.5201.5.120 Soft Plate **White**
-  08.8595.40A Junco 250 mm 2700K **White**
-  08.8595.06A Junco 250 mm 2700K **Chrome**
-  08.8595.AAA Junco 250 mm 2700K **Black**



### CERTIFICATIONS

