

LUX OUTDOOR

Recessed LED spot for outdoor and immersion use (max 1 m).

Sanded chromed brass or techno-polymer body. 1 high emission LED with different beam angles. Glass protection and waterproof cable gland. To install the spot, use the recessed installation box LUXCASSA1 (not included) or the steel fixation springs for false ceiling. Walk over.



BRASS | 3000K - 11°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 11°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	73lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201F17WCS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

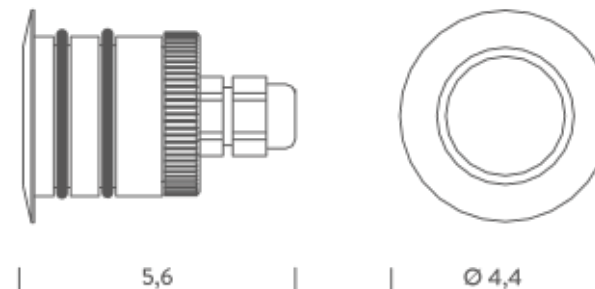

BRASS | 3000K - 25°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 25°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	68lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201417WCS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

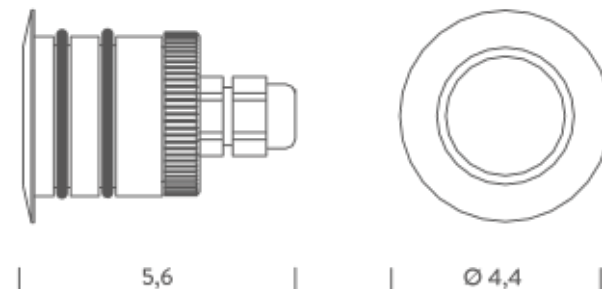

BRASS | 3000K - 80°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 80°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	50lm
Initial luminaire efficacy	42lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201617WCS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

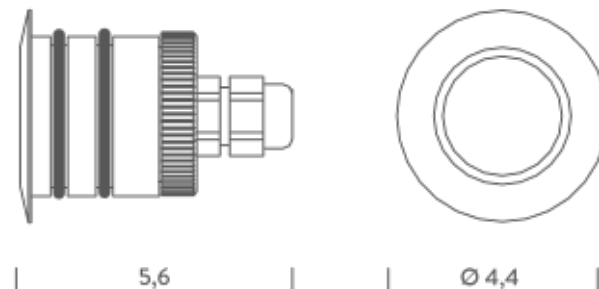

BRASS | 5000K - 11°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 11°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	100lm
Initial luminaire efficacy	83lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201F170CS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

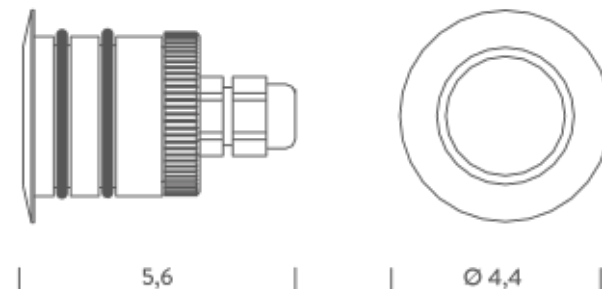

BRASS | 5000K - 25°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 25°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	75lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX02014170CS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

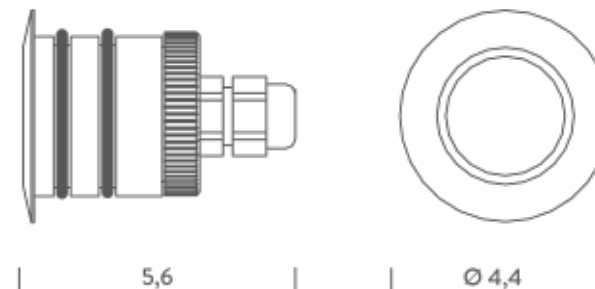

BRASS | 5000K - 80°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 80°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	55lm
Initial luminaire efficacy	46lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX02016170CS

Structure


grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

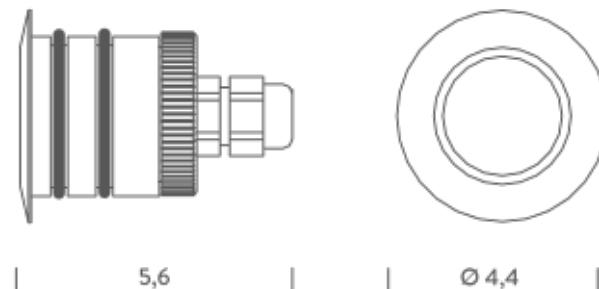

TECHNO-POLYMER | 3000K - 11°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 11°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	73lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201F17WTF

Structure



white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

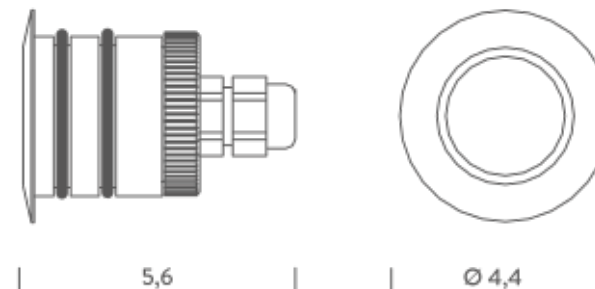

TECHNO-POLYMER | 3000K - 25°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 25°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	68lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201417WTF

Structure


white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

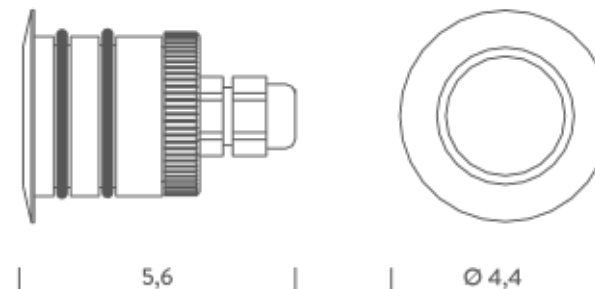

TECHNO-POLYMER | 3000K - 80°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 80°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	50lm
Initial luminaire efficacy	42lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201617WTF

Structure



white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

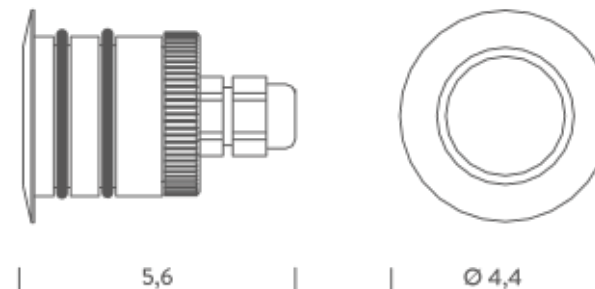

TECHNO-POLYMER | 5000K - 11°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 11°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	100lm
Initial luminaire efficacy	83lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX0201F170TF

Structure


white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

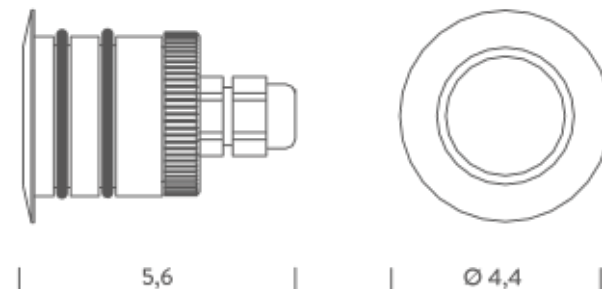

TECHNO-POLYMER | 5000K - 25°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 25°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	75lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX02014170TF

Structure


white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,25 kg

Certificazioni

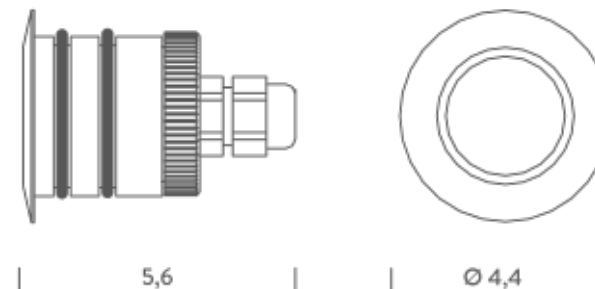

TECHNO-POLYMER | 5000K - 80°

LAMPING

Source	LED spot
Total power	1,2W
Emission	Direct 80°
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	55lm
Initial luminaire efficacy	46lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	68
Dimensions	Ø4,4x5,6cm
Materials	Techno-polymer
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; recessed box LUXCASSA1 not included, driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperature
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,25 kg

Codes

BLUX02016170TF

Structure

white

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0.25 kg

Certificazioni

