

# LUX SURFACE

LUX is a collection of high-performance spots for outdoor.

Lux Surface is suitable for downlight applications and guarantees a direct and homogeneous lighting. It is available in different finishes, color temperatures and beam angles. Driver on-board.



## SURFACE | 2700° - 14°

### LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901N43DAA  
BLUC0901N43DAN


### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

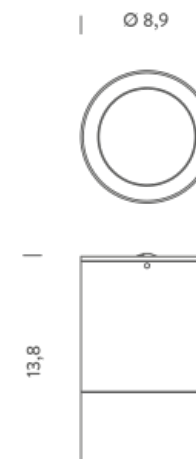

## SURFACE | 2700° - 53°

### LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901H43DAA  
BLUC0901H43DAN


### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

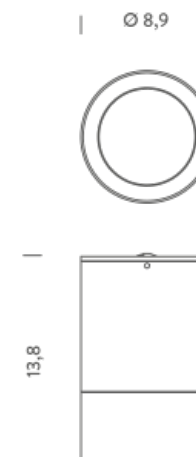

## SURFACE | 3000° - 14°

### LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	81lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901N43WAA  
BLUC0901N43WAN


### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

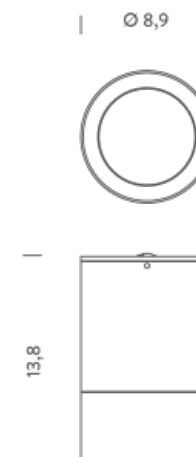

## SURFACE | 3000° - 53°

### LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901H43WAA  
BLUC0901H43WAN


### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

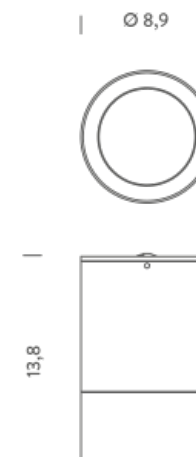

## SURFACE | 4000° - 14°

### LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901N43NAA  
BLUC0901N43NAN


### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

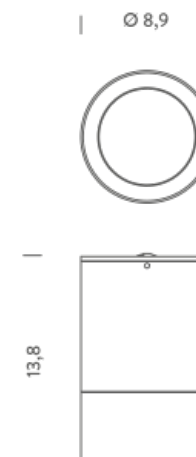

## SURFACE | 4000° - 53°

### LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	4000K
Luminous flux	1050lm
Initial luminaire efficacy	78lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board   UGR<19
Net lamp weight	1,03 kg

### Codes

BLUC0901H43NAA  
BLUC0901H43NAN

### Structure

grey  
black

### PACKAGE

Package 01      Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

### Certificazioni

