


TECHNICAL DATA SHEET ART. C.8130N - MICROGHOST SQUARE

Version is available on request

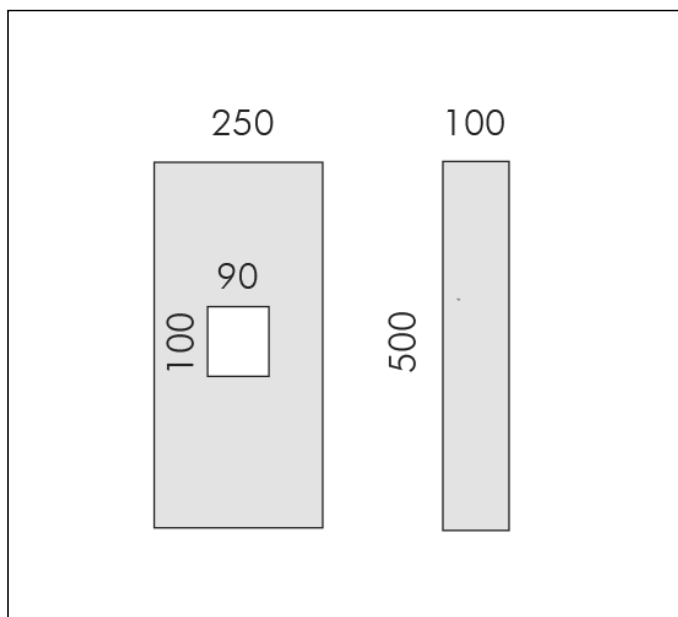


MODULES LED 4000K 24V 340lm CRI 80

Rated luminaire luminous flux: 260lm

Rated input power: 4W

Luminaire efficacy: 65lm/W

Without transformer

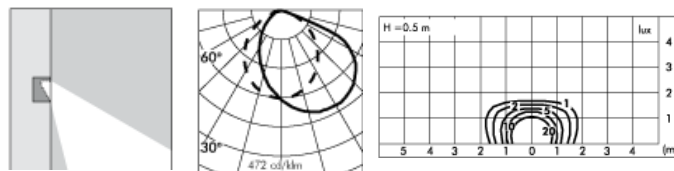

* Computer-simulated photometrics



PRODUCT TYPE

Wall mounted luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Ghost for insulation panel may be installed inside the exterior insulating panel. The degree of insulation of the house will stay unchanged for it is manufactured of the same type of polystyrene insulation. Attention should be paid though to the positioning of the corrugated tube for electrification. The height of Ghost for insulation panel has been designed to take on standard AED35 (50cm) insulating blocks while the thickness (10 cm) facilitates the integration in insulating panels with the same or greater thickness. The cavity is pre-finished and ready for painting. After installation the finish of the wall will proceed as usual: 1. Lay the grid, first levelling; 2. Carve the grid at the Ghost's cavity; 3. Second levelling and possible whitening; 4. At the end of the work install the lighting body. Mechanical resistance IK 06

LIGHTING PERFORMANCE

Toughened glass diffuser. LOR --

WIRING

Supplied with a pre-wired 3m H05RN-F cable. Isolation: CLASS III . Available colours: Cast cement. Weight: Kg Glow Wire test: --

L.E.D circuit included.

GHOST PATENT PENDING, REGISTERED DESIGN

This luminaire contains built-in LED modules with energy class: A, A+, A++. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user (Regulation UE 874/2012).

LED circuit boards are engineered accordingly to actual Lumen Maintenance regulation (LM80) and Technical Memorandum (TM21) where uniformity and quality of light is 50.000 hours referred to L70 B20 Ta 25°C.

Lifecycle refers to LED circuit boards only, all others components of the luminaire are excluded.

EMERGENCY VERSIONS

The fittings operates both on AC (50/60Hz) and DC (0Hz) voltage.

TECHNICAL DATA SHEET ART. C.8130N - MICROGHOST SQUARE ACCESSORIES



S.3402
REMOTE POWER SUPPLY DIMMABLE 40W IP67
Dimmable 1-10V for monochromatic LED
40W 240V/24V DC
IP67
The Total power of all connected luminaires may not be higher than the power of the driver.
Dimensions 150x53x35mm



S.3407
REMOTE POWER SUPPLY 100W IP66
for monochromatic LED 100W 240V/24V DC.
IP66
The Total power of all connected luminaires may not be higher than the power of the driver.
Dimensions 210mm x70mm x40mm