



TECHNICAL DATA SHEET ART. S.3924 - MICROSLOT DOWNLIGHT

Available until 31/12/2017 but subject to stock levels

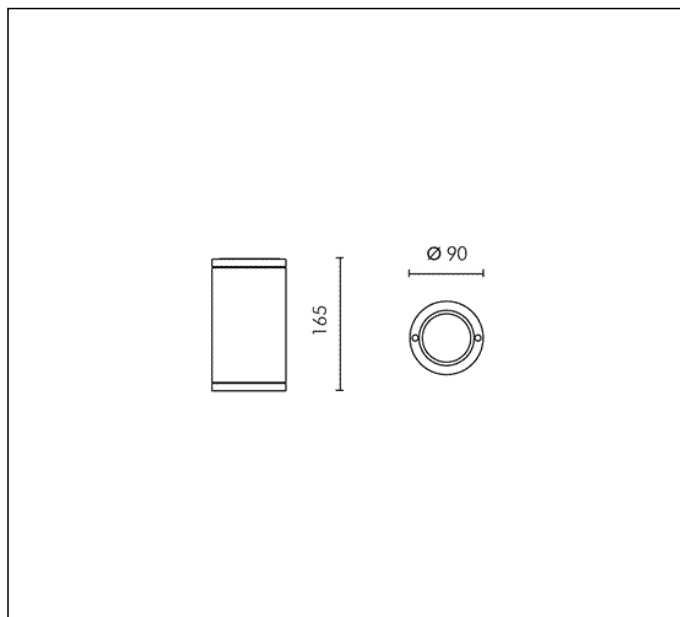

QR-CBC 51 20W GU5,3
 Rated luminaire luminous flux: 195lm
 Rated input power: 22W
 Luminaire efficacy: 9lm/W (LOR: --)
 Electronic ballast 220÷240V 50/60Hz

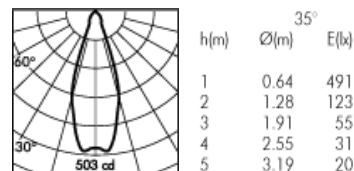

PRODUCT TYPE

Down-light luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Silicone gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. Mechanical resistance IK 08

LIGHTING PERFORMANCE

Clear toughened glass 6 mm thick. Lamp adjustable $\pm 10^\circ$ position. LOR --

WIRING

Single cable entry ($\varnothing 8 \div 12$ mm). Isolation: CLASS I. Available colours: Aluminium grey (cod.14). Weight: 1 Kg Glow Wire test: 850°C

Lamp not included.

This luminaire is compatible with bulbs of the energy classes: B (Regulation UE 874/2012).

TECHNICAL DATA SHEET ART. S.3924 - MICROSLOT DOWNLIGHT ACCESSORIES




S.3991
EXTENSIVE LENS

All the lenses and the coloured filters must be installed below the front glass. It's possible to install only an accessory at a time, so it's not possible to install coloured filters and lenses together.

It enlarges the standard beam from 32° to ~60°.

Available until 31/12/2017 but subject to stock levels



S.3992
ELLIPSOIDAL LENS

All the lenses and the coloured filters must be installed below the front glass. It's possible to install only an accessory at a time, so it's not possible to install coloured filters and lenses together.

It modifies the standard beam from 10° to ~12°x60°.

Further information

FIXING BASE

