



## TECHNICAL DATA SHEET ART. S.4609 - EOS SQUARE

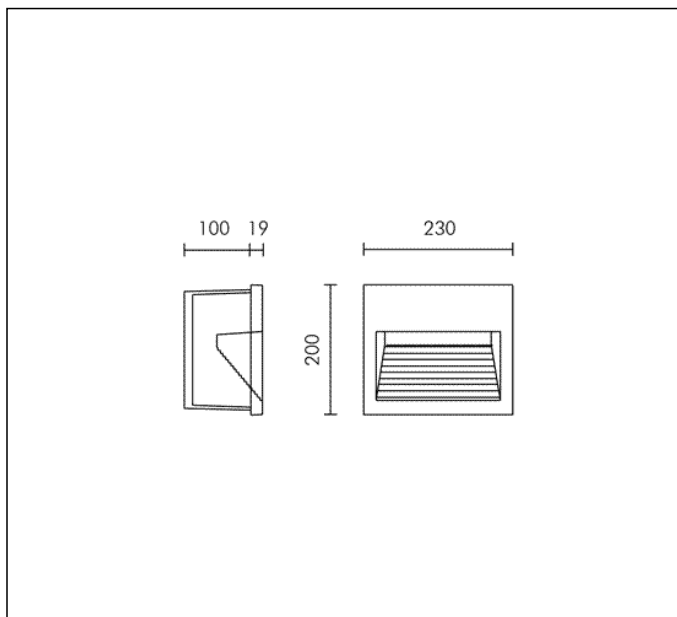

TC-DEL 18W G24q-2 1200lm  
 Rated luminaire luminous flux: 120lm  
 Rated input power: 22W  
 Luminaire efficacy: 5lm/W (LOR: 7%)  
 Electronic ballast 230÷240V 50Hz

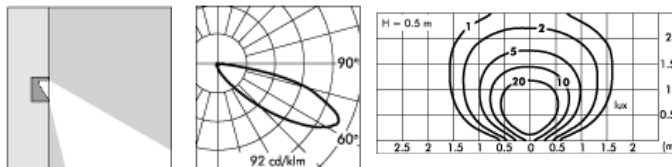

### PRODUCT TYPE

Wall mounted luminaire. IP rating IP 65

### MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. EPDM gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. Mechanical resistance IK 06

### LIGHTING PERFORMANCE

Reflector in 99.98% pure anodized aluminium . Opal toughened glass diffuser. LOR 7%

### INSTALLATION AND MAINTENANCE

Installation is simple with polypropylene recessing box. Appropriate plastic supports reinforce the centre of the structure. This strategy prevents buckling during the concrete wall construction phase. The luminaires are fixed in the recessing box by stainless steel screws. The glass diffuser is siliconed directly in the cover. The glass is safely protected against blows or vandalism. The cover hides the recessing box edge, holes and other wall imperfections.

### WIRING

Double cable entries. Isolation: CLASS I . Available colours: Aluminium grey (cod.14). Weight: 2.3 Kg Glow Wire test: 850°C

**Lamp not included.**

**This luminaire is compatible with bulbs of the energy classes: A (Regulation UE 874/2012).**


## TECHNICAL DATA SHEET ART. S.4609 - EOS SQUARE ACCESSORIES



**S.4343**  
**RECESSING BOX SQUARE**  
217 x 187 mm.  
Width 100 mm.



**S.4350**  
**BOLLARD**  
Die-cast aluminium column.  
Base 240 x 160 mm  
H = 550 mm  
TO BE USED WITH THE FOLLOWING ACCESSORIES:  
S.4372 FLANGE FOR BOLLARD  
Order luminaire EOS SQUARE separately.



**S.4372**  
**FLANGE FOR BOLLARD**  
Flange 220mmx151mm h 170mm in steel with screws in stainless steel (to be fixed in concrete).  
Footstall dimension can be calculated according to your country norms and ground properties.