

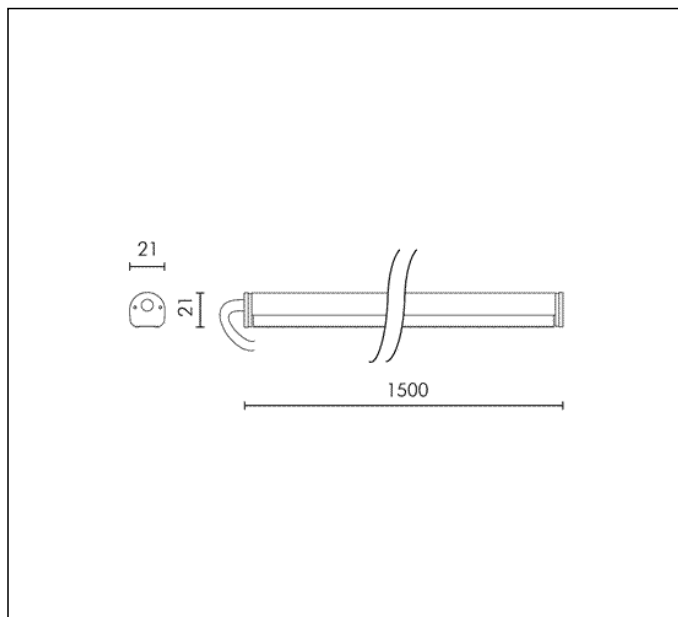


TECHNICAL DATA SHEET ART. S.5915W - LED ROD L = 1,5 m



MODULES LED 3000K 24V 850lm CRI 80
 Rated luminaire luminous flux: 751lm
 Rated input power: 7.8W
 Luminaire efficacy: 96lm/W
 Without transformer



h(m)	E(lx)				
2.0	3.0	3.0	2.0	1.5	
1.6	6.0	5.0	3.5	2.0	
1.2	12	10	5.5	3.0	
0.8	34	28	11	4.0	
0.4	140	100	19	4.0	

0.15 m 0 0.5 1 1.5 (m)



PRODUCT TYPE

Wall mounted luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Fixing base in extruded anodized EN AW-6060 aluminium housing (copper free) with high corrosion resistance. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Pre treated Silicone Gaskets. Mechanical resistance IK 08 Maximum load capacity --

LIGHTING PERFORMANCE

acid-etched polycarbonate diffuser 1,5 mm thick. Lamp fixed position. LOR --

INSTALLATION AND MAINTENANCE

Transparent silicone end caps. The LED circuit and aluminium profile can be easily cut to size. The aluminium profiles can be easily shortened by using a small hacksaw. The length of the LED circuit can be cut in 10 cm sections or multiples. After snapping the circuit with nippers it is imperative to re-position it in the center of the aluminium profile in order to obtain an optimal lighting effect. Example: in case of a window frame with 87 cm width, the 1 m rod will be cut to 87 cm while the LED circuit will be shortened to 80 cm (by clipping off the end opposite to the supply cable entry) and re-position the circuit into the center of the rod so to obtain a uniform distribution of light.

WIRING

Supply 0.3m cable section type H07RN-F. Isolation: CLASS III . Available colours: Anodized aluminium (cod.13). Weight: 0.4 Kg Glow Wire test: --

L.E.D circuit included.

This luminaire contains built-in LED modules with energy class: A, A+, A++. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user (Regulation UE 874/2012).

LED circuit boards are engineered accordingly to actual Lumen Maintenance regulation (LM80) and Technical Memorandum (TM21) where uniformity and quality of light is 50.000 hours referred to L70 B20 Ta 25°C.

Lifecycle refers to LED circuit boards only, all others components of the luminaire are excluded.

TECHNICAL DATA SHEET ART. S.5915W - LED ROD L = 1,5 m ACCESSORIES



S.3402
REMOTE POWER SUPPLY DIMMABLE 40W IP67
Dimmable 1-10V for monochromatic LED
40W 240V/24V DC
IP67
The Total power of all connected luminaires may not be higher than the power of the driver.
Dimensions 150x53x35mm



S.3407
REMOTE POWER SUPPLY 100W IP66
for monochromatic LED 100W 240V/24V DC.
IP66
The Total power of all connected luminaires may not be higher than the power of the driver.
Dimensions 210mm x70mm x40mm



S.3428
BOX WITH DALI REMOTE POWER SUPPLY
50W 230V/24V d.c.
Dimensions 260mm x260mm x100mm
IP55



S.3429
BOX WITH DALI REMOTE POWER SUPPLY
100W 230V/24V d.c.
Dimensions 260mm x260mm x100mm
IP55