


## DORENO

round, white, 75°, 4000K

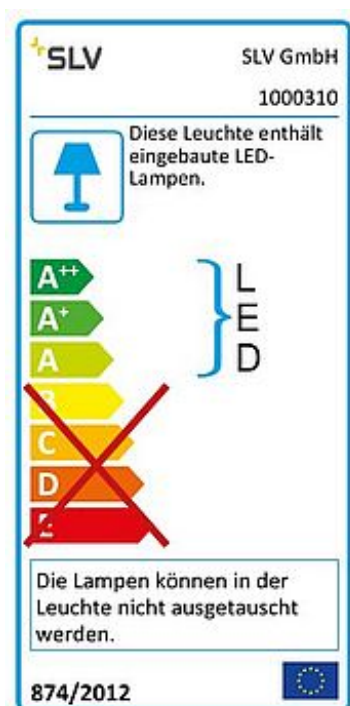

Article number	1000310
Feed-in capability	No
Lamp included	No
Installation diameter	17.5 cm
Installation depth	16 cm
Height	10.9 cm
Diameter	26 cm
Net weight	0.883 kg
Gross weight	1.254 kg
Voltage	700mA/1000mA/1050mA
Protection class	III
IP-rating	IP 20
Beam angle	75 Degree
Average lifespan	25000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	80
Luminous flux	3000 lm
Energy efficiency class	A++
Way of mounting	Recessed mounted / Ceiling recessed / Ceiling recessed with accessories
Colour	white
Form	round
Light distribution type 1	direct

---

Light distribution type 2 rotational symmetric

Material	Aluminium
----------	-----------

Type of plug open cable end

The simplicity and effectiveness of the innovative DORENO downlight is captivating. It is available in 3000K and 4000K. Equipped with a powerful, warm white LED, the downlight can be used in any lighting situation. The electrical connection is made using an exclusive LED driver.

#### Notes

---

---

---