



SLV

KAMUELA

fire protection recessed ceiling light, LED, 3000K, black, 38°, dimmable, IP65

Article number 1001015

Feed-in capability No

Lamp included No

Installation diameter 7 cm

Installation depth 7.1 cm

Height 7.1 cm

Diameter 8.8 cm

Net weight 0.271 kg

Gross weight 0.333 kg

Voltage 220-240V ~50Hz

Max. wattage 5 Watt

Protection class II

IP-rating IP 65

Beam angle 38 Degree

Average lifespan 25000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 400 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Ceiling recessed

Colour black


Form round

Light distribution type 1 direct

Light distribution type 2 rotational symmetric

Material TBD

SLV

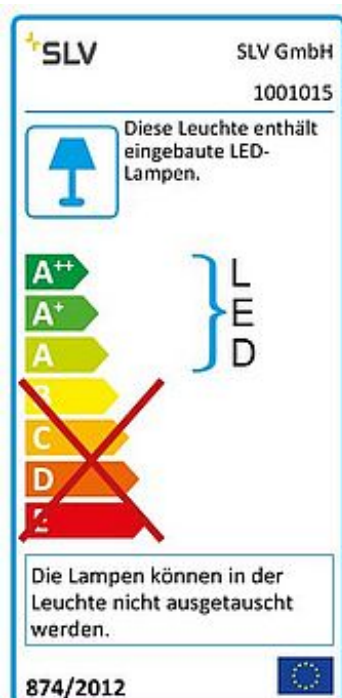

The KAMUEL ECO LED recessed fitting is equipped with an integrated premium LED. The recessed light is made of aluminium and plastic and is fitted with a warm-white LED. The fire-resistant recessed fitting series is fire-resistant for at least 90 minutes. An appropriate dimmable constant current driver is integrated for operating the recessed fitting, and is therefore suitable for direct connection to 230 Volts. This luminaire contains built-in LED lamps and is available with different housing colours. EEL: A - A++. The lamps in the luminaire cannot be replaced.

Notes
