


**SLV KAMUELA**

fire protection recessed ceiling light, LED, 4000K, white, 38°, dimmable, IP65

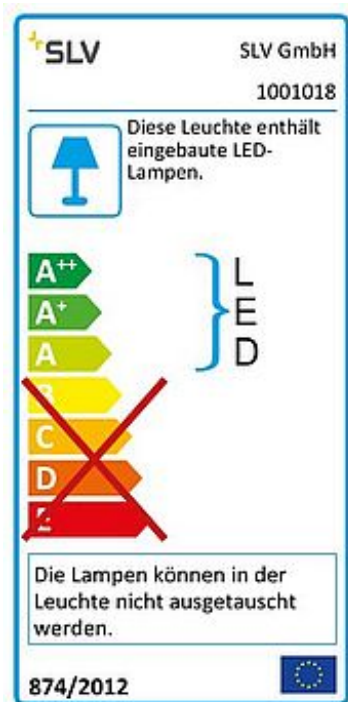

Article number	1001018
Feed-in capability	No
Lamp included	No
Installation diameter	7 cm
Installation depth	7.1 cm
Height	7.1 cm
Diameter	8.8 cm
Net weight	0.267 kg
Gross weight	0.326 kg
Voltage	220-240V ~50Hz
Max. wattage	5 Watt
Protection class	II
IP-rating	IP 65
Beam angle	38 Degree
Average lifespan	25000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	80
Luminous flux	400 lm
Energy efficiency class	A++
Way of mounting	Recessed mounted / Ceiling recessed
Colour	white
Form	round
Light distribution type 1	direct
Light distribution type 2	rotational symmetric
Material	TBD

The KAMUEL ECO LED recessed fitting is equipped with an integrated premium LED. The recessed light is made of aluminium and plastic and is fitted with a cold-white LED. The fire-resistant recessed fitting series is fire-resistant for at least 90 minutes. An appropriate dimmable constant current driver is integrated for operating the recessed fitting, and is therefore suitable for direct connection to 230 Volts. This luminaire contains built-in LED lamps and is available with different housing colours. EEL: A - A++. The lamps in the luminaire cannot be replaced.

## Notes

---

---

---