



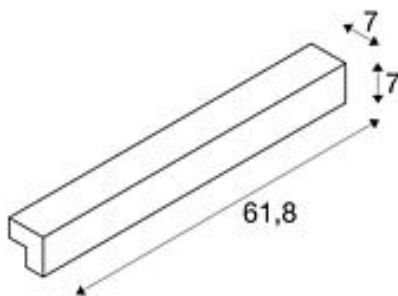

L-LINE 60 LED

wall and ceiling light, IP44, 3000K, 1500lm, white

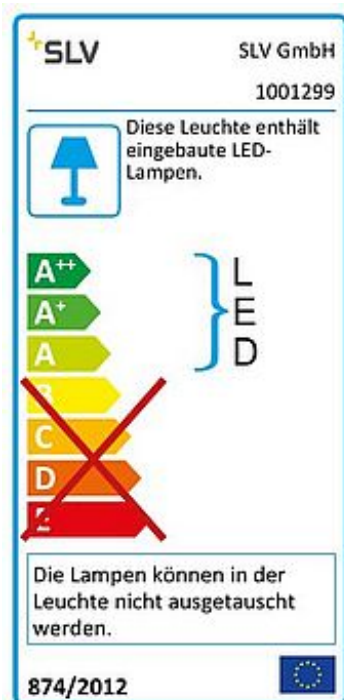

| | |
|---------------------------|------------------------------|
| Article number | 1001299 |
| Feed-in capability | No |
| Lamp included | No |
| Width | 61.8 cm |
| Height | 7 cm |
| Depth | 7 cm |
| Net weight | 1.19 kg |
| Gross weight | 1.426 kg |
| Voltage | 220-240V ~50/60Hz sec. 350mA |
| Protection class | I |
| IP-rating | IP 44 |
| Beam angle | 120 Degree |
| Average lifespan | 30000 Hours |
| Colour temperature | 3000 Kelvin |
| Colour rendering index | 80 |
| Luminous flux | 820 lm |
| Energy efficiency class | A++ |
| Colour | white |
| Form | square |
| Light distribution type 1 | direct |
| Light distribution type 2 | symmetric |
| Light distribution type 3 | indirect |
| Light distribution type 4 | symmetric |
| Material | Aluminium/plastic PC |

The L-LINE 120 wall and ceiling light, which is equipped with a warm-white LED module, is the ultimate LED solution for primary room illumination thanks to the LED output. The sleek and elegant L-LINE 120 is available in white, silver-grey and grey. Thanks to the integrated LED driver, the luminaire can be connected directly to a 230 Volt mains power supply.

Notes
