
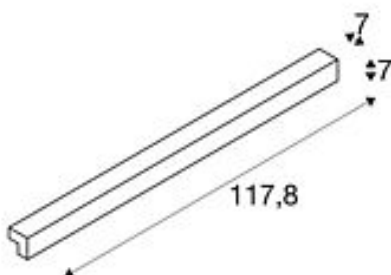


L-LINE 120

wall and ceiling light, LED, 3000K, IP44, silver, L/W/H 118/7/7 cm, 3000 lm, 2x12.9W

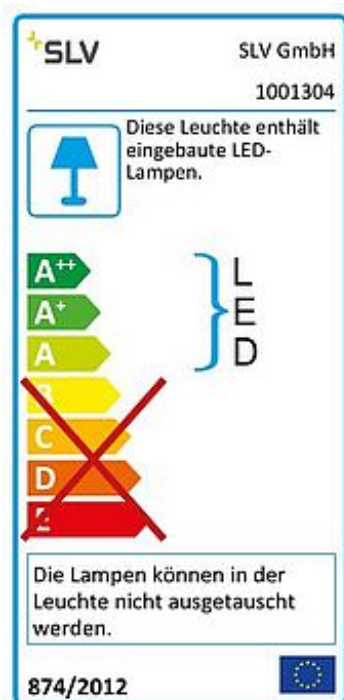

Article number	1001304
Feed-in capability	No
Lamp included	No
Width	117.8 cm
Height	7 cm
Depth	7 cm
Net weight	2.055 kg
Gross weight	2.421 kg
Voltage	220-240V ~50/60Hz sec. 350mA
Protection class	I
IP-rating	IP 44
Beam angle	120 Degree
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	1650 lm
Energy efficiency class	A++
Way of mounting	Surface mounted / Wall mounted
Colour	silver anodised
Form	square
Light distribution type 1	direct
Light distribution type 2	symmetric
Light distribution type 3	indirect
Light distribution type 4	symmetric
Material	Aluminium/plastic PC

The L-LINE 120 wall and ceiling light, which is equipped with a warm-white LED module, is the ultimate LED solution for primary room illumination thanks to the LED output. The sleek and elegant L-LINE 120 is available in white, silver-grey and grey. Thanks to the integrated LED driver, the luminaire can be connected directly to a 230 Volt mains power supply.

Notes
