


## PIKA downlight

round, brass, MR16, adjustable, max. 50W

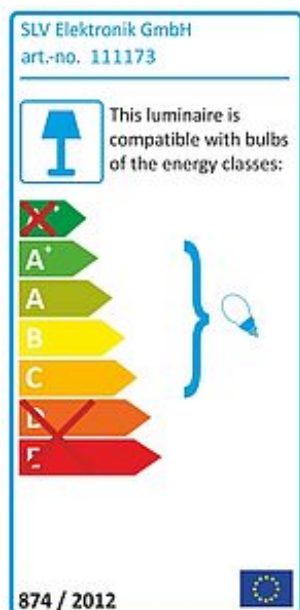

Article number	111173
Catalogue	BIG WHITE 2015, Page 400
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	G5,3
Number of light sources	1
Lamp included	No
Installation diameter	7.5 cm
Installation depth	8.5 cm
Tilt range	45 Degree
Height	9 cm
Diameter	8.3 cm
Net weight	0.112 kg
Gross weight	0.137 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	brass
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

The adjustable low-voltage downlight PIKA is available in white, chrome, brass and silvergrey colour and allows independent adjustment of the desired beam angle. To operate the downlight a matching transformer with 12V AC voltage is needed. This luminaire is compatible with bulbs of the energy classes: C - A+