
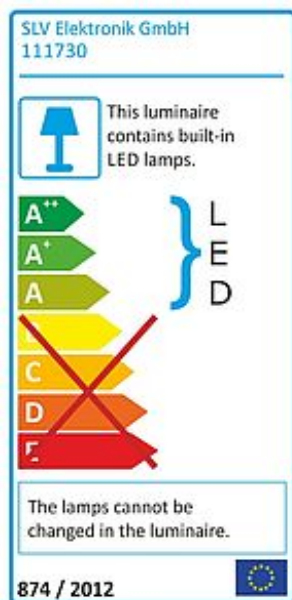



## PADI LED 600

aluminium anodized, neutral white SMD LED

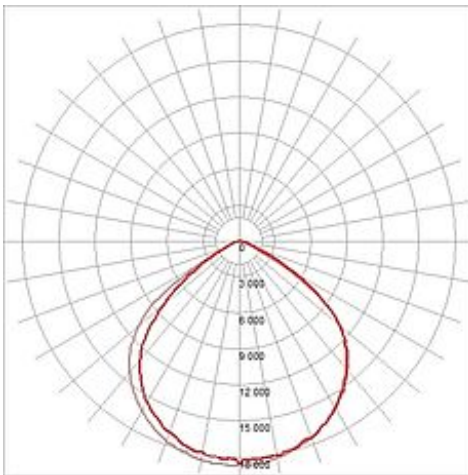

Article number	111730
Catalogue	BIG WHITE 2015, Page 683
LED distance	1 Meter
Type of lamp	LED lamp
Lamp	SMD LED
Number of light sources	48
Lamp included	Yes
Length	60.6 cm
Width	1.6 cm
Height	0.8 cm
Net weight	0.137 kg
Gross weight	0.223 kg
Voltage	24 Volt
Max. wattage	4 Watt
Protection class	III
Beam angle	120 Degree
Material	aluminium / plastic
Colour	aluminium
Way of mounting	surface wall mounting / surface ceiling mounting
Remark 1	150 cm connection lead and 3 fastening clamps included
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Average lifespan	20000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	>80
Luminous flux	370 lm
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++
Light distribution type 1	direct

Light distribution axisymmetric  
type 3



The PADI LED 600 light bar is equipped with 48 long lasting SMD LED with a radiation angle of 120 °, which are embedded in a high quality aluminum profile. PADI LED 600 is available in either pure or warmwhite light color. For the ease of assembly appropriate mounting brackets are included. For the operation of PADI LED 600 a suitable 24V DC power supply is required. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.