
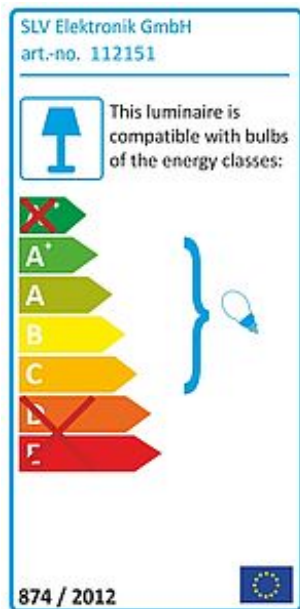


GIMBLE round MR16 downlight

round, white, max. 50W, adjustable

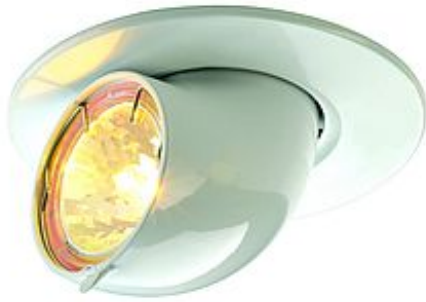

Article number	112151
Catalogue	BIG WHITE 2015, Page 406
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	G5,3
Number of light sources	1
Lamp included	No
Installation diameter	9.5 cm
Installation depth	12 cm
Tilt range	90 Degree
Rotation range	350 Degree
Diameter	11.5 cm
Net weight	0.451 kg
Gross weight	0.13 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	white
Way of mounting	recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

The GIMBLE ROUND low-voltage recessed ring is made from aluminium and available in white, silvergrey, chrome and matt chrome. The recessed ring is telescopic, tiltable by 90° and designed for halogen lamps with MR16 low-voltage socket. To operate the downlight a suitable transformer providing 12V alternating current is required. This luminaire is compatible with bulbs of the energy classes: C - A+