



TIDUR WALL wall profile

alu-brushed, 2xT5, 21W, incl. 2x3W LED spots warmwhite

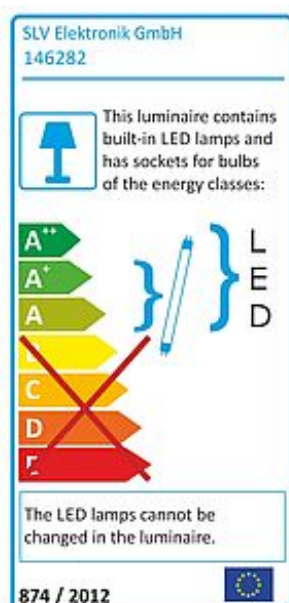

Article number	146282
Type of lamp	LED lamp / Conventional lamp
Lamp	T5 fluorescent bulb 2x21W & 2x3W PowerLED (incl.)
Lampholder / Socket	G5
Number of light sources	2
Lamp included	No
Tilt range	100 Degree
Rotation range	350 Degree
Width	200 cm
Height	12 cm
Depth	16.2 cm
Net weight	5.302 kg
Gross weight	0.523 kg
Voltage	230 Volt
Max. wattage	48 Watt
Protection class	I
Material	aluminium
Colour	aluminium brushed
Way of mounting	surface wall mounting
Remark 1	LED driver and electronic ballast for fluorescent bulb incorporated
Remark 2	Incl. 2 power LED spots with each 3 watt
Remark 3	Wall illumination and LED spots can be switched separately
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	>80
Luminous flux	140 lm
Energy class ballast	A2

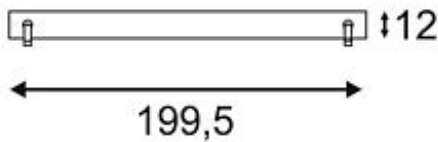

Suitable for
lamps from EEC A

Suitable for
lamps up to EEC A+

Suitable for
lamps from EEC A

Suitable for
lamps up to EEC A

Light distribution
type 1 direct

Light distribution
type 2 indirect

Light distribution
type 3 axisymmetric

Light distribution
type 4 rotationally symmetric

The main light source of the light TIDUR wall profile is composed by two T5 fluorescent tubes with 21W each, which guarantees a homogeneous illumination with high colour rendering. In addition, two switchable Power LED spots are integrated providing 3W output each. These are adjustable and available in either warm or pure white light colour. In both versions, the integrated 3W Power LED spots provide a beam angle of 30° for clearly structured reading light. Thanks to the already incorporated ballast and drivers, TIDUR is ready for direct connection to 230V mains supply. This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes: EEK: A - A+. The LED lamps cannot be changed in the luminaire.