




DOWNUNDER I recessed wall and ceiling luminaire

square, alu- nature, GY6,35, max. 50W

Article number	151970
Catalogue	BIG WHITE 2015, Page 471
Type of lamp	Conventional lamp
Lamp	2-pin base bulb GY6,35 12V max. 50W
Lampholder / Socket	GY6,35
Number of light sources	1
Lamp included	No
Installation length	11.5 cm
Installation width	14 cm
Installation depth	9 cm
Width	12 cm
Height	15.5 cm
Net weight	0.575 kg
Gross weight	0.116 kg
Voltage	12 Volt
Max. wattage	50 Watt
Protection class	III
Material	aluminium
Colour	aluminium
Way of mounting	recessed ceiling mounting / recessed wall mounting
Remark 1	Back-housing (W / H / D): 10,5 / 19,3 / 7,2 cm
Remark 2	Suitable flush-mount frame, article nr: 925200
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

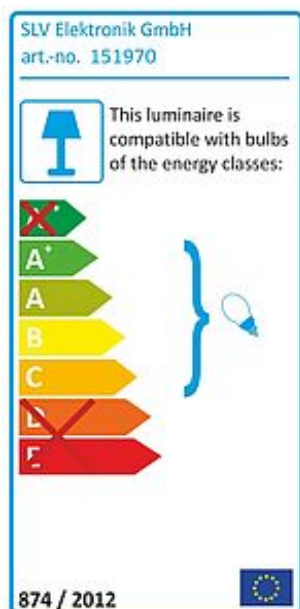

Aluminum wall luminaire of our DOWNUNDER series. The not visibly mounted GY6.35 halogen source emits the light indirectly onto the surface to be illuminated. This guarantees glare-free illumination of sidewalks and much more. The DOWNUNDER 1 recessed luminaire is available in natural aluminium colour version. To operate the luminaire, a suitable transformer is required providing 12V alternating current. A mounting frame for installation in masonry can be ordered from the accessory. This luminaire is compatible with bulbs of the energy classes: C - A+