


DOWNUNDER II recessed wall and ceiling luminaire

square, alu- nature, G24d-1, 13W

Article number	151971
Catalogue	BIG WHITE 2015, Page 471
Type of lamp	Conventional lamp
Lamp	TC-D compact fluorescent bulb 13W
Lampholder / Socket	G24d-1
Number of light sources	1
Lamp included	No
Installation length	21 cm
Installation width	28.5 cm
Installation depth	9 cm
Width	22.1 cm
Height	30.5 cm
Net weight	2.06 kg
Gross weight	0.144 kg
Voltage	230 Volt
Max. wattage	13 Watt
Protection class	I
Material	aluminium
Colour	aluminium
Way of mounting	recessed ceiling mounting / recessed wall mounting
Remark 1	Conventional ballast incorporated
Remark 2	Back-housing (W / H / D): 20 / 38,5 / 9 cm
Remark 3	Suitable flush-mount frame, article nr: 925250
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	B2
Suitable for lamps from EEC	B
Suitable for lamps up to EEC	A
Light distribution type 1	direct

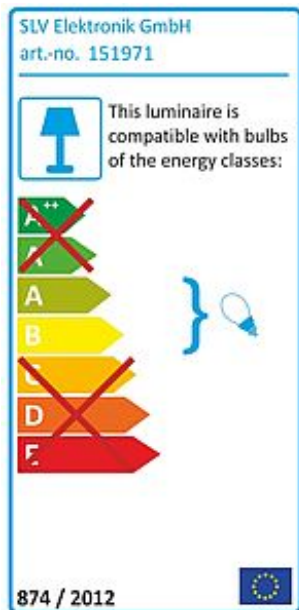

Light distribution asymmetric
type 3

Aluminum wall luminaire of our DOWNUNDER series. The not visibly mounted TC-D energy-saving lamp with G24d-1 socket emits the light indirectly onto the surface to be illuminated. This guarantees glare-free illumination of sidewalks and much more. The DOWNUNDER 2 recessed luminaire is available in natural aluminium colour version. The already incorporated ballast makes it suitable for direct connection to 230V mains supply. A mounting frame for installation in masonry can be ordered from the accessory. This luminaire is compatible with bulbs of the energy classes: B - A