
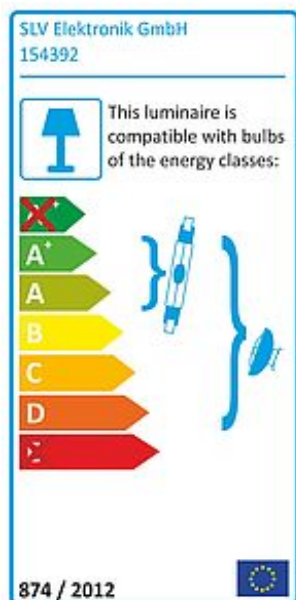


AIXLIGHT SHOP II pendant


silvergrey, 2x R7s, max. 70W, 2x G53, max. 75W

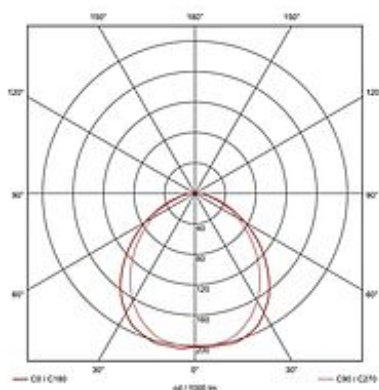

Article number	154392
Type of lamp	Conventional lamp
Lamp	QRB 111 12V max. 75W & HQI-TS / CDM-TD 70W
Lampholder / Socket	G53 & Rx7s
Number of light sources	4
Lamp included	No
Tilt range	30 Degree
Length	118 cm
Width	19 cm
Height	9.5 cm
Pendant length	250 cm
Net weight	5.123 kg
Gross weight	3.335 kg
Voltage	230 Volt
Max. wattage	290 Watt
Protection class	I
Material	aluminium
Colour	silvergrey
Way of mounting	ceiling mounting pendulum
Remark 1	Electronic ballast incorporated
Remark 2	Canopy (L / W / H): 8 / 4,8 / 2,8 cm
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	A2
Suitable for lamps from EEC	D
Suitable for lamps up to EEC	A+
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

Light distribution type 3 rotationally symmetric

Light distribution type 4 axisymmetric

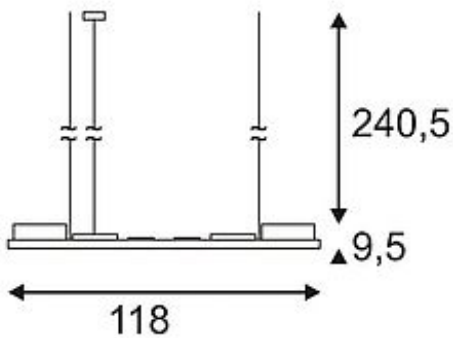

The high-voltage pendant luminaire AIXLIGHT SHOP 2 is the professional solution for office lighting concepts and commercial applications. The two outer, adjustable modules are equipped with one Rx7s lampholder each for the use of metal halide lamps, while the two inner, also adjustable lampholders are designed for low-voltage QRB111 halogen lamps. Thanks to the incorporated, electronic transformer, AIXLIGHT SHOP 2 is supplied ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: D - A+ / A - A+