
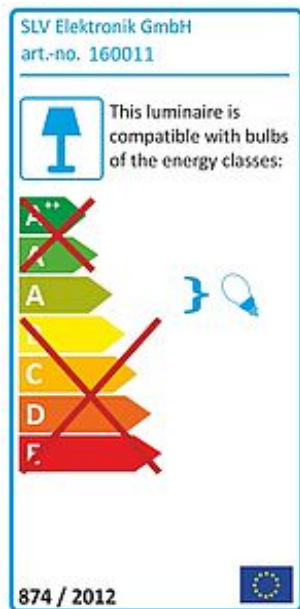


TC DL 2x 13W EVG

white, TC-DE Energy Saver

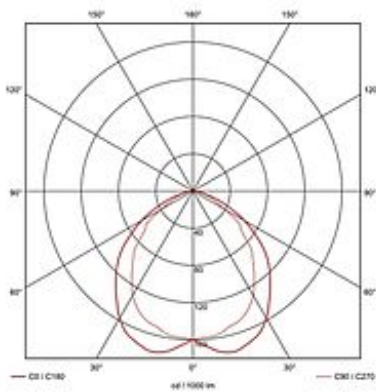

| | |
|------------------------------|---|
| Article number | 160011 |
| Type of lamp | Conventional lamp |
| Lamp | TC-DE compact fluorescent bulb 13W |
| Lampholder / Socket | G24q-1 |
| Number of light sources | 2 |
| Lamp included | No |
| Installation length | 12.5 cm |
| Installation width | 21 cm |
| Installation depth | 12 cm |
| Tilt range | 75 Degree |
| Length | 23 cm |
| Width | 14.5 cm |
| Net weight | 1.275 kg |
| Gross weight | 0.037 kg |
| Voltage | 230 Volt |
| Max. wattage | 26 Watt |
| Protection class | I |
| Material | aluminium |
| Colour | white |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | Electronic ballast incorporated |
| Remark 2 | Energy labels in your language are available in the Service Area sub point Download |
| Energy class ballast | A2 |
| Suitable for lamps from EEC | A |
| Suitable for lamps up to EEC | A |
| Light distribution type 1 | direct |
| Light distribution type 3 | axisymmetric |

The TC DL recessed downlight for commercial applications and those with high demands on clear light properties. Available in white and silvergrey colour version it is prepared for two 13W TC-DE energy-saving lamps with G24q-1 socket. Thanks to the already incorporated electronic ballast, the TC DL downlight is ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: A - A