



QUOR 52/G EVG downlight

white , glass partially satined, TC-DE, 2x 26W

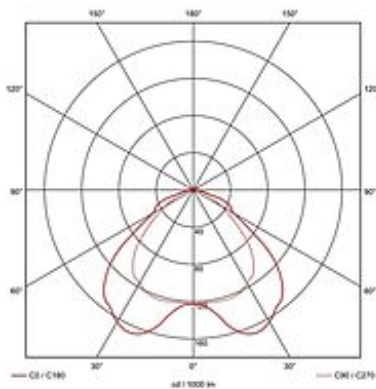

| | |
|------------------------------|---|
| Article number | 160020 |
| Catalogue | BIG WHITE 2015, Page 461 |
| Type of lamp | Conventional lamp |
| Lamp | TC-DE compact fluorescent bulb 26W |
| Lampholder / Socket | G24q-3 |
| Number of light sources | 2 |
| Lamp included | No |
| Installation length | 21 cm |
| Installation width | 21 cm |
| Installation depth | 13 cm |
| Length | 25 cm |
| Width | 25 cm |
| Height | 3 cm |
| Net weight | 2.032 kg |
| Gross weight | 1.458 kg |
| Voltage | 230 Volt |
| Max. wattage | 52 Watt |
| Protection class | I |
| Material | aluminium / glass |
| Colour | white |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | Electronic ballast incorporated |
| Remark 2 | Energy labels in your language are available in the Service Area sub point Download |
| Energy class ballast | A2 |
| Suitable for lamps from EEC | A |
| Suitable for lamps up to EEC | A |
| Light distribution type 1 | direct |
| Light distribution type 3 | axisymmetric |

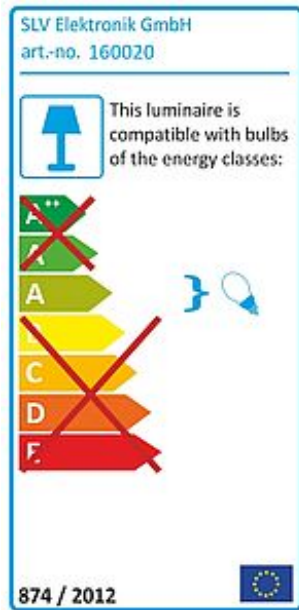

The QUOR 52/G recessed downlight for commercial applications and those with high demands on clear light properties. Available in white and silvergrey colour version it is prepared for two 26W TC-DE energy-saving lamps with G24q-3 socket. A frame-mounted, partially frosted glass shade gives the lamp its unique character and ensures glare-free lighting properties. Thanks to the already incorporated electronic ballast, the QUOR52/G downlight is ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: A - A