

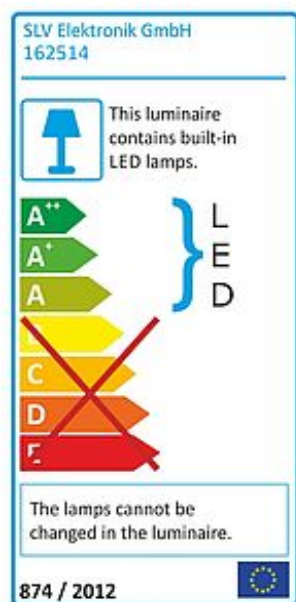


## ECO LED PANEL ROUND downlight

round , silvergrey, 14W, 3000K

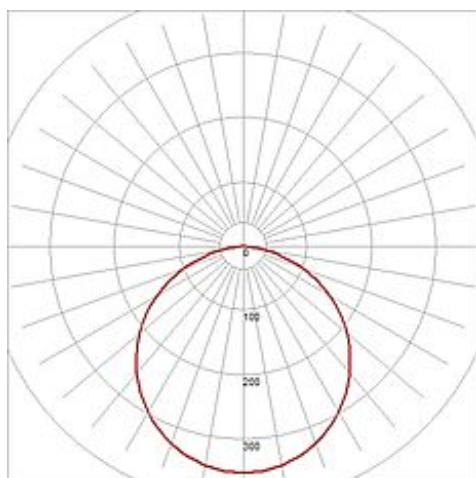

Article number	162514
Catalogue	BIG WHITE 2015, Page 420
Type of lamp	LED lamp
Lamp	SMD LED
Number of light sources	132
Lamp included	Yes
Installation diameter	22.8 cm
Installation depth	4 cm
Height	3 cm
Diameter	24 cm
Net weight	0.549 kg
Gross weight	0.492 kg
Max. wattage	14 Watt
Protection class	III
Material	aluminium / acrylic
Colour	silvergrey
Way of mounting	recessed ceiling mounting
Remark 1	Only suitable for ceilings with a thickness between 15 - 22 mm
Remark 2	Operate with suitable 350 mA drivers only
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	1000 lm
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

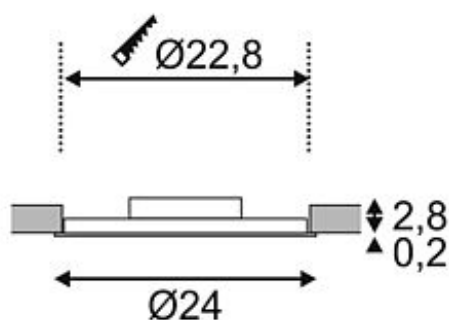

The ultra-flat ECO LED PANEL ROUND recessed ceiling luminaire convinces by its low installation depth and is equipped with 96 or 132 warm white SMD LED depending on the version. Thus, it ensures a high light output even at most difficult installations. Available in white and grey colour version, the electrical connection of both the round and the square version is made directly to 230V mains via the separately available LED driver. To achieve a glare-free light, the LEDs are installed behind a frosted cover. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.