

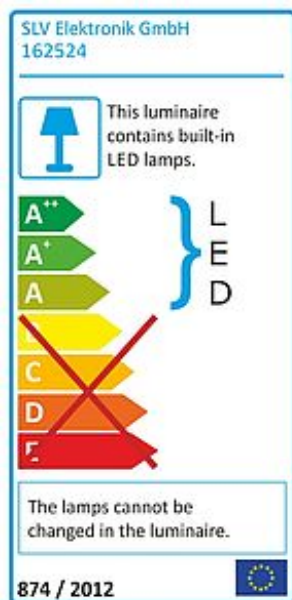


## ECO LED PANEL SQUARE downlight

square, silvergrey, 10W, 3000K

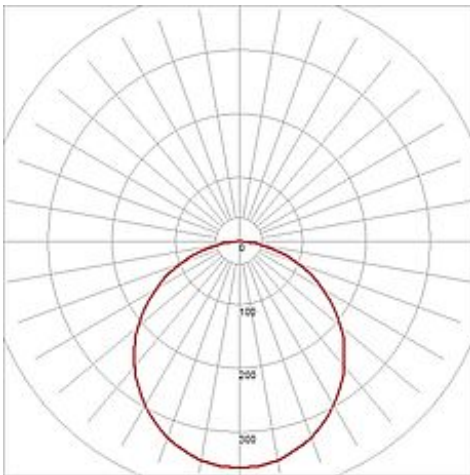

Article number	162524
Catalogue	BIG WHITE 2015, Page 463
Type of lamp	LED lamp
Lamp	SMD LED
Number of light sources	11
Lamp included	Yes
Installation length	18.6 cm
Installation width	17 cm
Installation depth	4 cm
Length	20 cm
Width	20 cm
Height	3 cm
Net weight	0.479 kg
Gross weight	0.76 kg
Max. wattage	12 Watt
Protection class	III
Material	aluminium / acrylic
Colour	silvergrey
Way of mounting	recessed ceiling mounting
Remark 1	Only suitable for ceilings with a thickness between 15 - 22 mm
Remark 2	Operate with suitable 350 mA drivers only
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Average lifespan	20000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	540 lm
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++

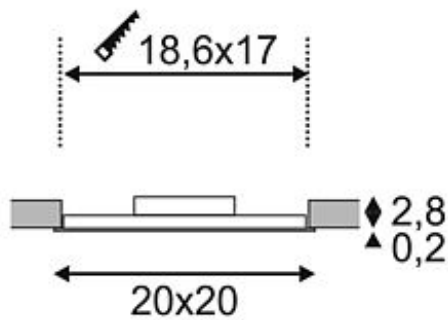

Light distribution  
type 1      direct

Light distribution type 3	rotationally symmetric
------------------------------	------------------------

The ultra-flat ECO LED PANEL SQUARE recessed ceiling luminaire convinces by its low installation depth and is equipped with 11 warm white SMD LED. Thus, it ensures a high light output even at most difficult installations. Available in white and grey colour version, the electrical connection of both the round and the square version is made directly to 230V mains via the separately available LED driver. To achieve a glare-free light, the LEDs are installed behind a frosted cover. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.