
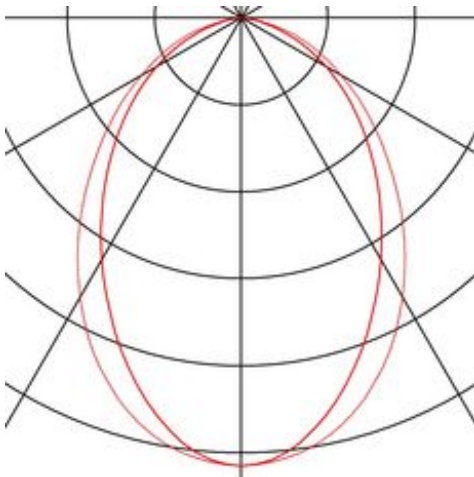


## SPOODI 20

outdoor spot, LED, 3000K, IP55, square, black, max. 28W

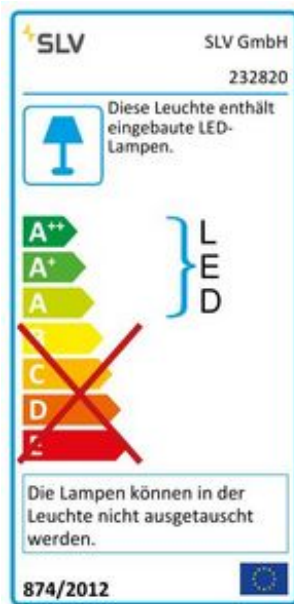

|                           |                              |
|---------------------------|------------------------------|
| Article number            | 232820                       |
| Max. wattage              | 28 Watt                      |
| Light distribution type 1 | Direct                       |
| Light distribution type 3 | Axis-symmetric               |
| Feed-in capability        | No                           |
| Lamp included             | No                           |
| Length                    | 20 cm                        |
| Width                     | 5 cm                         |
| Height                    | 15.5 cm                      |
| Net weight                | 1.526 kg                     |
| Gross weight              | 1.723 kg                     |
| Voltage                   | 230 ~50 Volts                |
| Protection class          | I                            |
| IP-rating                 | IP 55                        |
| Beam angle                | 80 Degree                    |
| Material                  | Aluminium/glass              |
| Colour                    | black                        |
| Way of mounting           | Floor mounted / wall mounted |
| Average lifespan          | 30000 Hours                  |
| Colour temperature        | 3000 Kelvin                  |
| Colour rendering index    | 80                           |
| Luminous flux             | 2365 lm                      |
| Energy efficiency class   | A++                          |
| Type of plug              | IP Schuko plug               |
| fastCalcEnabled           | No                           |
| ranking                   | 500                          |
| Catalogue page            | BIG WHITE 2017: 599          |

Powerful LED spot SPOODI 20 for illuminating areas and spaces. With a tiltable installation bracket and protection class IP55, the spot is suitable for outdoor installation on the wall or on the floor. By means of the incorporated driver and connection lead with mains plug, the spot supplied ready for direct connection to 230V mains supply.