
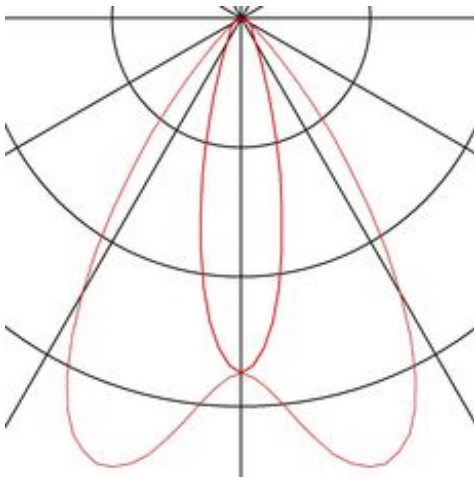


P-LIGHT

ceiling light, double-headed, LED, 6000K, oval, white, 6,5W

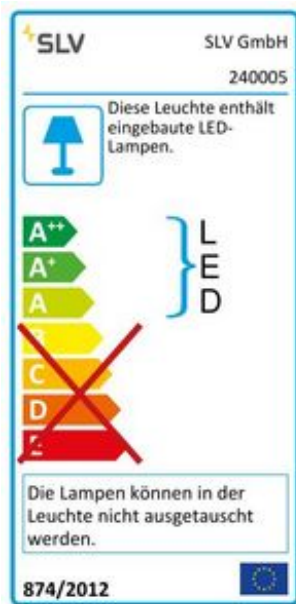

Article number	240005
Max. wattage	2 Watt
Light distribution type 1	Direct
Product family	P-Light
Feed-in capability	No
Lamp included	No
Length	18.5 cm
Width	10.4 cm
Height	5.5 cm
Net weight	0.491 kg
Gross weight	0.571 kg
Voltage	220-240 ~50/60 Volts
Protection class	II
Beam angle	30 Degree
Material	ABS/plastic PC
Colour	white
Way of mounting	Ceiling mounted / wall mounted
Average lifespan	25000 Hours
Colour temperature	6000 Kelvin
Colour rendering index	75
Luminous flux	220 lm
Energy efficiency class	A++
fastCalcEnabled	No
ranking	100
Catalogue page	BIG WHITE 2017: 725

P-LIGHT suitable for use as emergency lighting for surface-mounted wall and ceiling lights. Can also be used as emergency indication luminaire with the optionally available pictograms. The safety lights are fitted with two built-in Ni-MH batteries with an automatic self-test and detection range of 30m. The emergency operating time of the luminaires is three hours. The luminaires can be operated permanently switched on / stand-by operation. The electrical connection is directly to the 230V supply. Other variants of the P-LIGHT series are available.