






OBOQ SQUARE

CEILING RECESSED

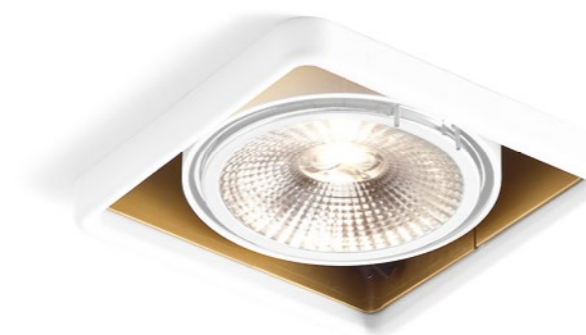

1.0 LED111

LED 13W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium | steel powder coated

1.02kg IP20 ± 0.3 P $\star 38^\circ$

138x138 $\angle 25^\circ/25^\circ$ $\sphericalangle 365^\circ$ $\text{lm} 150$ $\text{lm} 2-25$

CODE	
	120268J_
	120268E_
	120268K_

Light Colour Selection

	LUMEN CRI	CODE
2700K	715 >80	2
3000K	730 >80	4

1.0 QR111

QR111 max.75W | G53
12V | excl. transformer
aluminium | steel powder coated

0.84kg IP20 ± 0.9

138x138 $\angle 25^\circ/25^\circ$ $\sphericalangle 365^\circ$ $\text{lm} 150$ $\text{lm} 2-25$

CODE	
	120230JO
	120230EO
	120230KO

ALWAYS USE

transformer

CODE	
12V 60W	90221902
12V 105W	90221903

