







# OBOQ SQUARE

CEILING RECESSED

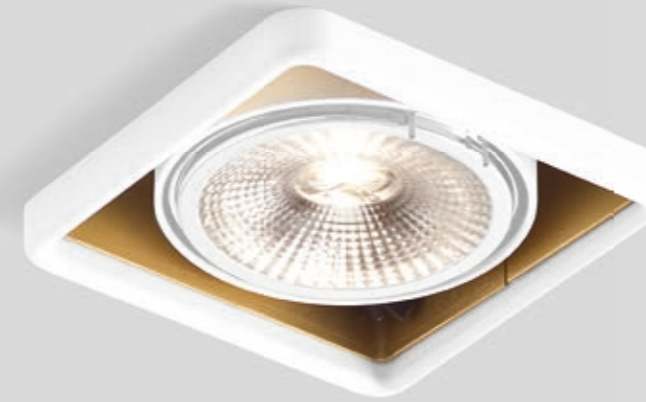

## 1.0 LED111

LED 10W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

1.02kg IP20 0.3-1 P A 38°

140x140 25°/25° 360° 150 2-25

## 1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

1.02kg IP20 0.3-1 P A 30°

140x140 25°/25° 360° 150 2-25

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. power supply  
aluminium | steel powder coated

0.84kg IP20 0.9-1

140x140 25°/25° 360° 150 2-25



	CODE
	120268J
	120268E
	120268K

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	710   >80	2
3000K	730   >80	4

	CODE
	120278J
	120278E
	120278K

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	1050   >80	2
3000K	1200   >80	4

	CODE
	120230J0
	120230E0
	120230K0

### ALWAYS USE

power supply

	CODE
12V   10W dim	90221401
12V   25W dim	90221701
12V   70W dim	90221904

more specs on page 540