

# ELLO

20-08-2015

## 13.0

LED 18W | 220-240VAC | 50-60Hz | PCB 3-step | phase-cut dim

CE P20 960°C 0,3m

3000K | >85CRI | 940lm



white texture

500284W4


black texture

500284B4

base plate dimensions

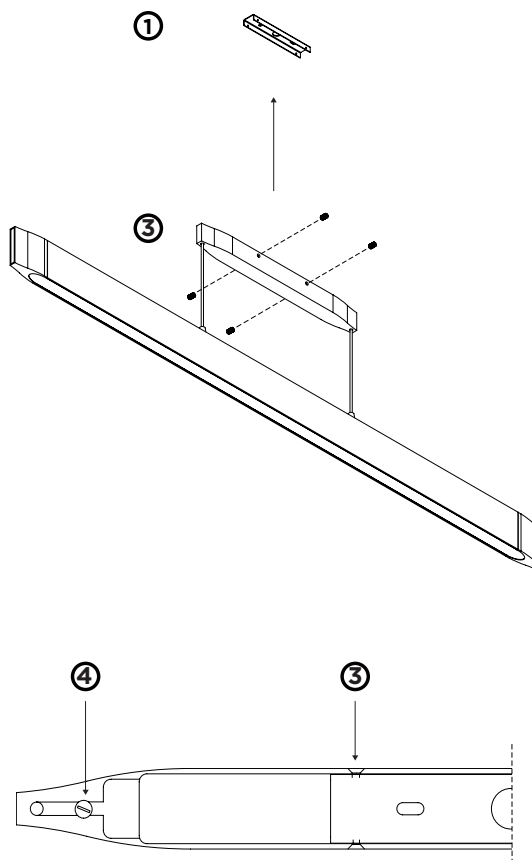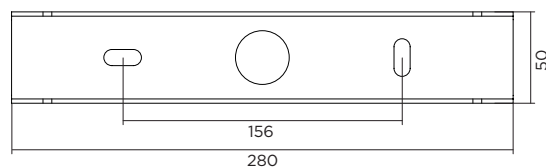

## DIMENSIONS

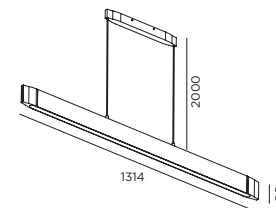


### ① MOUNTING INSTRUCTION

Remove the base plate from the ELLO and attach to the ceiling with screws

### ② POWER CONNECTION

Connect the transfo.  
connection: STANDARD version



③ Attach the ELLO back to the base plate with the side screws

④ For cable length adjustment:  
- Loosen plastic screw inside the ceiling base and bring to the required length  
- Tighten the cable again with the plastic screw  
- Re-connect at one side



WEVER & DUCRÉ  
LIGHTING

[www.weverducre.com](http://www.weverducre.com)

INSTALLATION  
INSTRUCTIONS