

INCH

03-Nov.-2016

1.5

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP20 960°C 0.3m

3000K | >80CRI | 480lm

white texture
aluminium brushed
black texture

312164W4
312164L4
312164B4

2.6

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP20 960°C 0.3m

3000K | >80CRI | 480lm

white texture
aluminium brushed
black texture

312264W4
312264L4
312264B4

5.4

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP20 960°C 0.3m

3000K | >80CRI | 480lm






white texture
aluminium brushed
black texture

312364W4
312364L4
312364B4


INCH 1.5

INCH 2.6

INCH 5.4

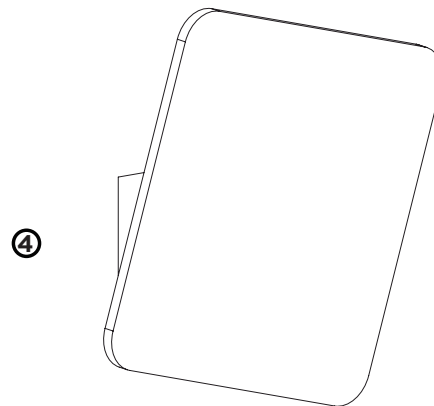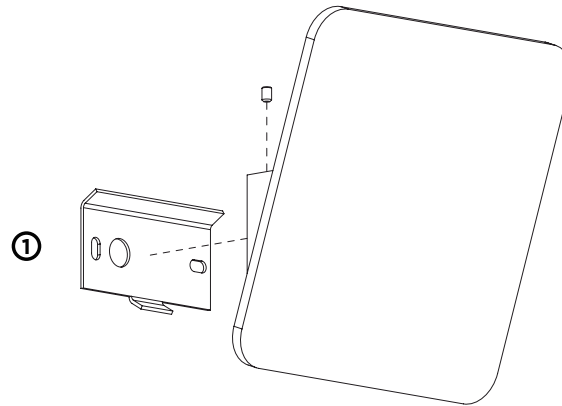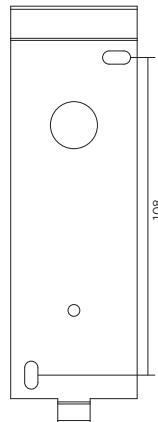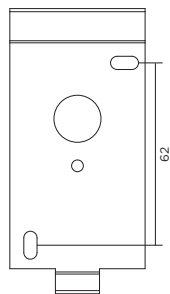

DIMENSIONS

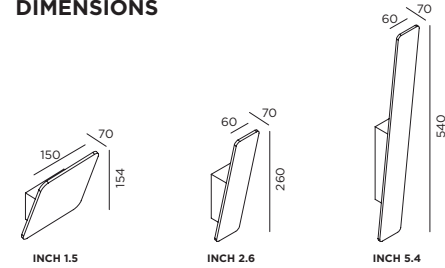


MOUNTING INSTRUCTION

- 1 Remove the back plate
- 2 Fixate the back plate to the wall with screws

POWER CONNECTION

- 3 Connect the transfo

Interior: STANDARD version



- 4 Fixate the body to the back plate



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS