

# PLUXO

10-06-2015

## 2.0 LED111

LED 2x13W | 220-240V | 50-60Hz | AC-COB 3-step | phase-cut dim




CE IP20 960° 0,3m 38° 45°/45° 45°/45°

white texture	143268W_
silver / grey	143268S_
black texture	143268B_


### OPTIONAL

2700K   >80CRI   640lm	2
3000K   >80CRI   680lm	4

ceiling base dimensions

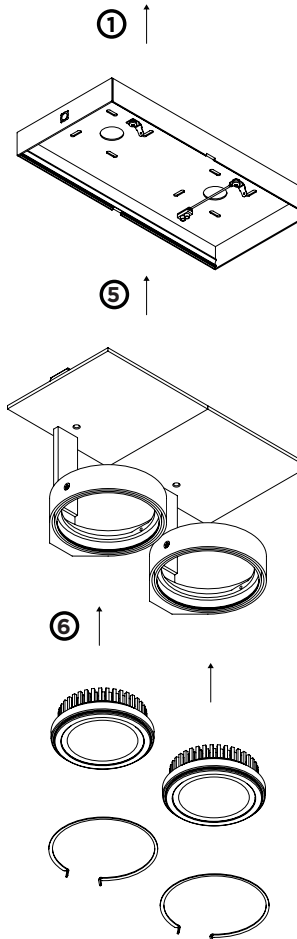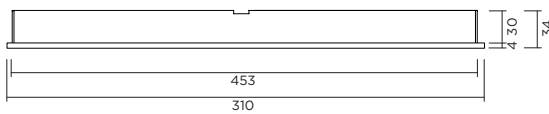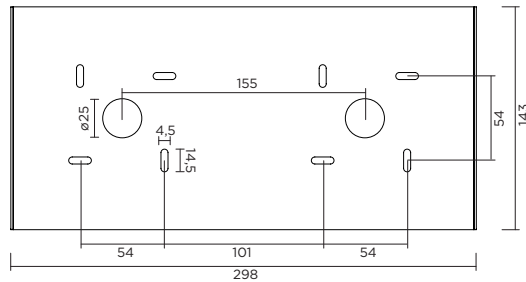

## DIMENSIONS




## MOUNTING INSTRUCTION

- 1 Mount the ceiling base to the ceiling with screws

## POWER CONNECTION

- 2 Connect per PLUXO fixture the earthing wire to the slider on the ceiling base.

### PARALLEL CONNECTION

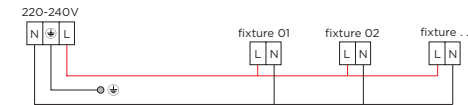

- 3 Connect the LED modules
- 4 Connect the PLUXO fixtures to each other with the included through wiring cables
- 5 Click the PLUXO on the ceiling base
- 6 Insert the lamp in lampring and fix with spring



WEVER & DUCRÉ  
LIGHTING

[www.weverducre.com](http://www.weverducre.com)

INSTALLATION  
INSTRUCTIONS