

PLUXO CLUST

01-06-2015

2.0

LED 2x13W | 220-240VAC | 50-60Hz | AC-COB 3-step | phase-cut dim

CE IP20 960° C 0.3m P 38° 45°/45° 45°/45°

white texture 143864W_
silver / grey 143864S_

LIGHT COLOUR

2700K | >80CRI | 2x640lm 2
3000K | >80CRI | 2x680lm 4

4.0


LED 4x13W | 220-240VAC | 50-60Hz | AC-COB 3-step | phase-cut dim

CE IP20 960° C 0.3m P 38° 45°/45° 45°/45°


white texture 143764W_
silver / grey 143764S_

LIGHT COLOUR

2700K | >80CRI | 2x640lm 2
3000K | >80CRI | 2x680lm 4

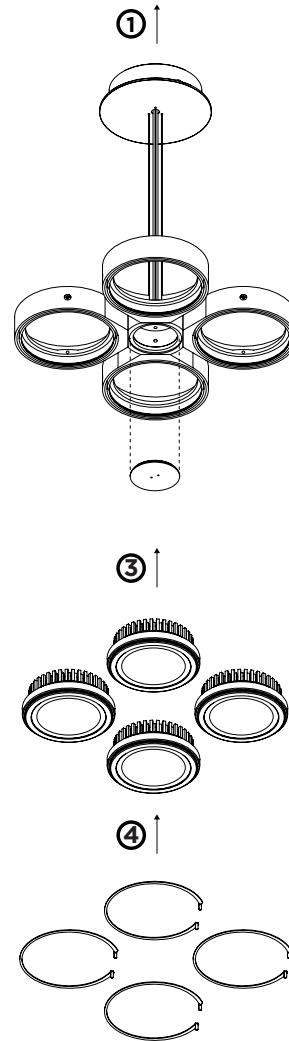

DIMENSIONS

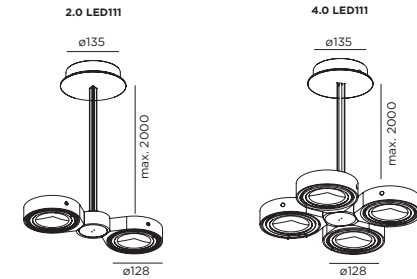

MOUNTING INSTRUCTION

- 1 Attach the base to the ceiling with screws

POWER CONNECTION

- 2 Remove the inner cover of the PLUXO CLUST. It is attached with magnets.

Interior: STANDARD connection
Quick-connectors are included



- 3 Insert the lamps and connect them in the inner space of the PLUXO CLUST. Strip the cable length of the lamps to approximately 15cm
- 4 Fix the lamps with spring
- 5 Attach the inner cover back on the PLUXO CLUST with the magnets



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS