

ROBY

23-May-2017

2.6 HV

LED 18W | 220-240VAC | 50-60Hz | PCB 3-step | phase cut dim

CE IP20 0,3m P

3000K | >80CRI | 1400lm

white texture
silver / grey

135784W4
135784L4

3.5 HV


LED 32W | 220-240VAC | 50-60Hz | PCB 3-step | phase cut dim

CE IP20 0,3m P


3000K | >80CRI | 2700lm

white texture
silver / grey


135884W4
135884L4




ROBY 2.6

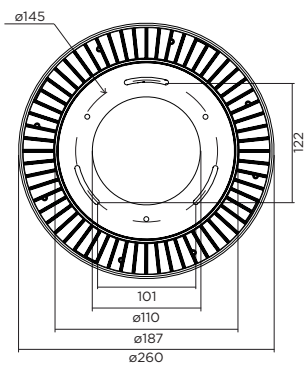

ROBY 3.5

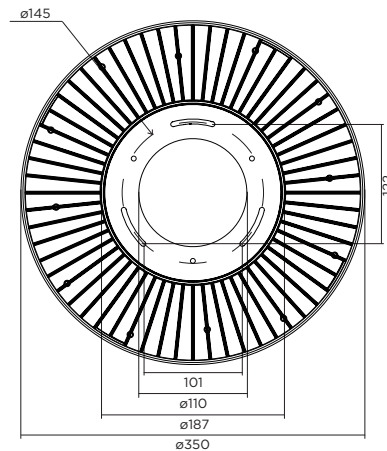


Keep the inner edge upwards

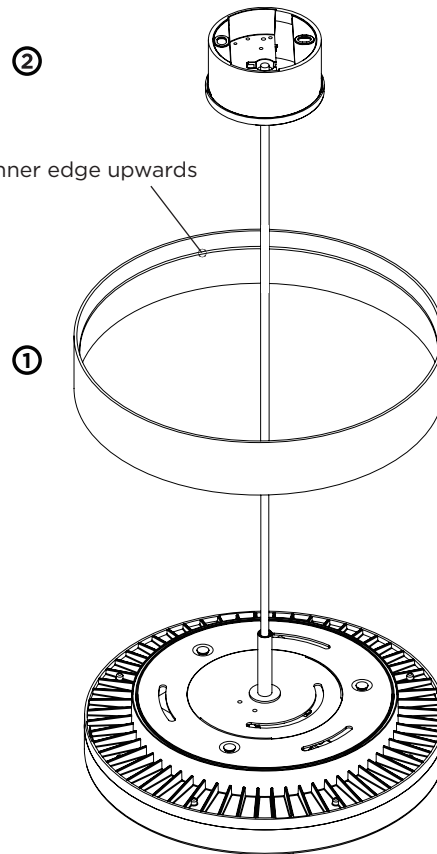

ROBY 2.6 & ROBY 3.5 have
the same base plate mounted.

DIMENSIONS

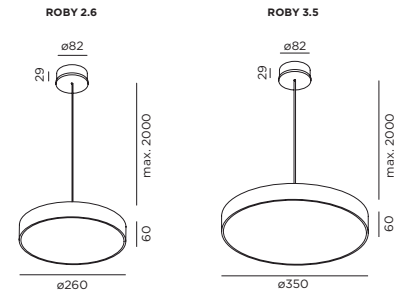


MOUNTING INSTRUCTION

- Put the ROBY cover on top of the fixture before mounting the fixture to the ceiling.
- Attach the ceiling base to the ceiling with screws.

POWER CONNECTION

- Interior connection: STANDARD version



The light source of the integrated LED is not replaceable;
When the light source reaches its end of life the whole
luminaire should be replaced.



Caution, risk of electric shock



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS