


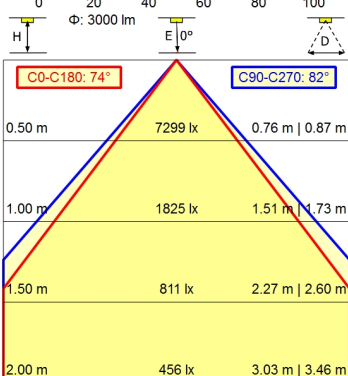



2 pin



1 pin

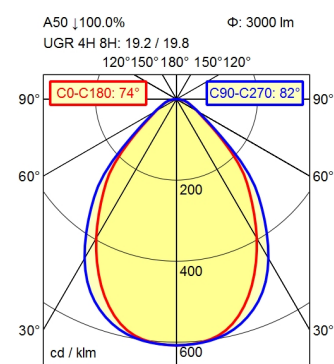

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Fastening

Decorative contrast side parts

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 33 W

approx. 3.000 lm

approx. 90 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 90; R9 $\geq$ 50

Direct

approx. 100 %

75°

< 3 SDCM

Conical prismatic screen

$\leq$ 3.800 cd/m²

$\leq$ 22

IP 20

I

Switchable; -

Rocker switch

Aluminium/plastic; Anodised; Aluminium coloured
anodised

Structured; Plastic

ca. 5,8 kg

ca. 0,08 m; Connector; 2 pin; 1 pin

extension range of rise-and-fall pendant 0.3 - 1.3 m

Black

Workplace-system luminaire Tameto
SAHZQ 88

112987000-00551386

