

# 8202002

Product Sheet

**ares**  
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Alice



Rectangular luminaire for installation in the wall - recessed. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: sandblasted. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: I, LED module: I, III Installation: wiring through two M16 plastic cable glands (4,5<math>\phi</math><math><10\text{mm}</math>) placed on the back side of the fitting. Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. Installation requires a dedicated box to be ordered separately.

IP65   

### Available Colors for this Version

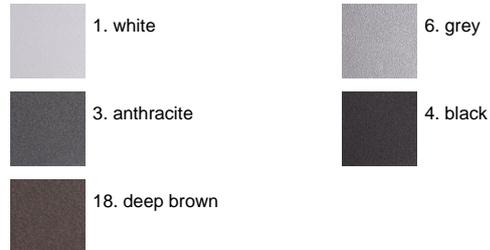

### Alice Power LED / All Light

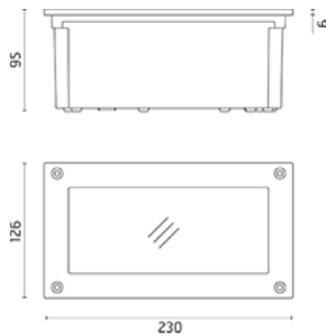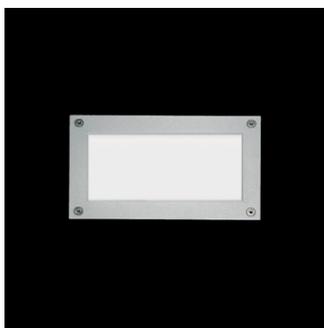

### Warnings

#### Wall Recessed



Recessed wall fitting



Remote device required



The fitting is equipped with 2 cable input.



Protection against impact. IK 08 - 05,00 joule

### Light Flux, Placement



### Product Code Details

# 8202002

Light Source



WARM WHITE 3000K MID-POWER LEDs 8,8W/220÷240V  
Total power 11W  
LED lm 1198 ÷ OUTPUT lm 400  
CRI >80  
Integral electronic power supply




## Accessories

---



Code: 77  
Box for installation  
236 x 136 H 103 mm



Code: 237  
SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20 $\mu$ s)  
Maximum operating current 5A  
Suitable for series connection - IP66