

# 533023

Product Sheet

# ares


THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Anna

Outdoor / Indoor round luminaire for installation on ceiling or wall surface-mounted.  
Configuration: opal plastic diffuser with satin finish for a high light emission uniformity ratio.  
Die-cast aluminium fixing back-plate and turned aluminium structure and heat sink.  
Magnetic finish frame to hide the fixing screws. The luminaire is coated with polyester powders in single or double colour. Protection rating: IP65 In compliance with EN 60598-1 standards Class of Insulation: I Installation: the luminaire is equipped with two IP65 cable holders for rubber cables 5<math>\phi</math><math><10\text{mm}</math> (Anna  $\phi 210$  and  $\phi 310$ ) or cables 6<math>\phi</math><math><13\text{mm}</math> (Anna  $\phi 410$ ) and a quick-connect 2-pole terminal block. Outdoor installation requires suitable flexible cables assuring the watertightness of the cable holder.

### Anna410 Mid-Power LED / Bicolour Structure White-Yellow

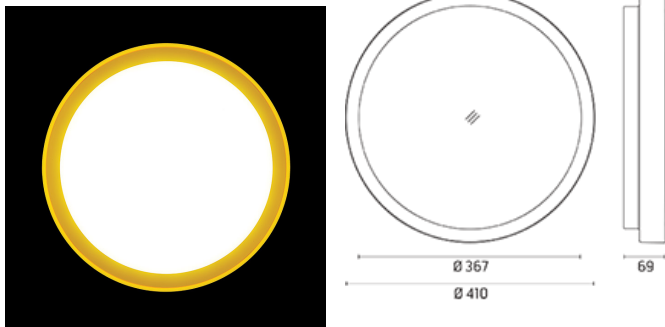

### Product Code Details

# 533023

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 27,9W/110=240V  
Total power 34W  
LED lm 4318 ÷ OUTPUT lm 2340  
CRI>80  
Integral electronic power supply  
Dimmable on request



IP65

### Warnings

#### Decorative



Ceiling fitting



The fitting is equipped with 2 cable input.



Protection against impact.  
IK 08 - 05,00 joule



Wall fitting

#### Wall/Ceiling



Ceiling fitting



The fitting is equipped with 2 cable input.



Protection against impact.  
IK 08 - 05,00 joule



Wall fitting

### Light Flux, Placement





Code: 237  
SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20 $\mu$ s)  
Maximum operating current 5A  
Suitable for series connection - IP66