

10517412

Product Sheet

ares
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Martina


Adjustable spotlight. Configuration: turned and anodized (raw or painted) aluminium structure with stainless steel adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67. In compliance with EN60598-1 standards. Class of insulation: III. Installation: the luminaire is equipped with 2000mm cable. Martina 24V and Maxi Martina 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina, Martina RGB and Maxi Martina RGB requires connection in series. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP67   

Available Colors for this Version

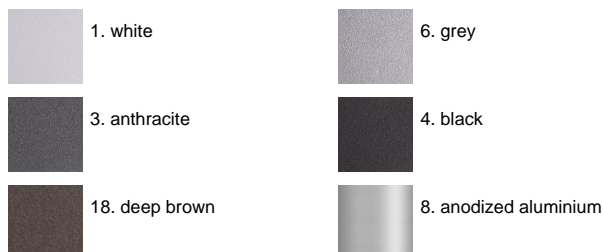

Martina RGB Power LED / Transparent Glass - Adjustable - Narrow Beam 10°

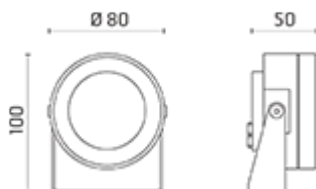

Warnings

Projector



Ceiling lamp.



Floor installation



Remote device required



Wall lamp.



Pre-wired with approx 2000mm of cable.



Protection against impact.
IK 05 - 0,70 joule MiniMartina
IK 07 - 2,00 joule
Martina/MaxiMartina

Light Flux, Placement



Product Code Details

10517412

Light Source



RGB POWER LED 3,4W/3CHx350mA

Total power 3,4W

Remote electronic power supply to be ordered



Accessories



Code: 141
Supported n. of lamps: 10
Power supply with DMX interface for RGB fixtures
36W/220÷240V-3CHx350mA
(3CHx10x1W) DMX control allowed
IP67 CLASS I SELV EQ.



Code: 142
DMX Controller
Dimmer switch for recessed box (60 mm hole centres)



Code: 143
DMX Controller
Stand-alone/PC interface



Code: 187
DMX splitter
Electronic device to regenerate the DMX signal.
1 input and 7 output. 12÷24Vdc
Power supply to be ordered (87 or 175 recommended)



Code: 186
DMX cable
Shielded twisted pair with 110 Ohm constant impedance