

10519012

Product Sheet

ares
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Martina


Adjustable spotlight. Configuration: turned and anodized (raw or painted) aluminium structure with stainless steel adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67. In compliance with EN60598-1 standards. Class of insulation: III. Installation: the luminaire is equipped with 2000mm cable. Martina 24V and Maxi Martina 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina, Martina RGB and Maxi Martina RGB requires connection in series. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP67   

Available Colors for this Version

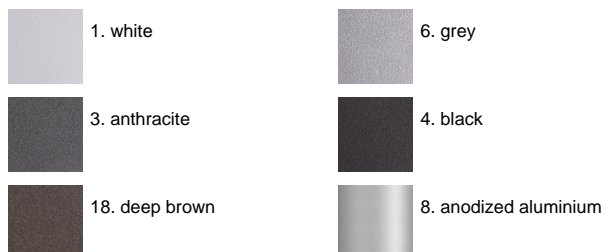

Martina Power LED / Transparent Glass - Adjustable - Narrow Beam 10°



Warnings

Projector



Ceiling lamp.



Floor installation



Remote device required



Wall lamp.



Pre-wired with approx 2000mm of cable.



Protection against impact.
IK 05 - 0,70 joule MiniMartina
IK 07 - 2,00 joule Martina/MaxiMartina

Light Flux, Placement



Product Code Details

10519012

Light Source



NATURAL WHITE 4000K POWER LEDs 3x1÷2W/350mA

Total power 3,3W@350mA - 5,1W@500mA

lm LED 342@350mA ÷ lm OUTPUT 307@350mA

lm LED 444@500mA ÷ lm OUTPUT 353@500mA

CRI>80

Remote electronic power supply to be ordered

Dimmable on request, acc.: 129,135,184,218





Code: 136
Ground spike
H 200 mm



Code: 236
2 way terminal block 3 poles IP68
(Ø 5,5÷12 mm cable)



Code: 150
Supported n. of lamps: 2
Power supply dual function
Vout 24Vdc: 8W/100÷240V
Iout 350mA: 6X1W/100÷240V
IP20 CLASS II SELV EQ.



Code: 106
Supported n. of lamps: 2
Power supply dual function
Vout 24Vdc: 8W/100÷240V
Iout 350mA: 6X1W/100÷240V - IP65 CLASS II SELV EQ.



Code: 68
Supported n. of lamps: 3
Power supply
10x1W/100÷265V - Iout 350mA
(7x1W@110V) IP40 CLASS II SELV EQ.



Code: 129
Supported n. of lamps: 5
Power supply
16x1W/110÷240V - Iout 350mA
(12x1W@110V) IP20 CLASS II SELV EQ.



Code: 184
Supported n. of lamps: 5
Power supply
16x1W/110÷240V - Iout 350mA (12X1W@110V)
IP67 CLASS II SELV.



Code: 135
Supported n. of lamps: 2
Power supply
13x2W/110÷240V-Iout 500mA
(7x2W@110V) IP20 CLASS II SELV EQ.



Code: 218
Supported n. of lamps: 2
Power supply
13X2W/110÷240V - Iout 500mA (7X2W@110V)
IP67 CLASS II SELV.