

496000

Product Sheet

ares
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Memi


Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: sandblasted. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: wiring through M16 plastic cable gland (4,5mm<Ø<10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

IP65   

Available Colors for this Version



Memi / Sandblasted Glass

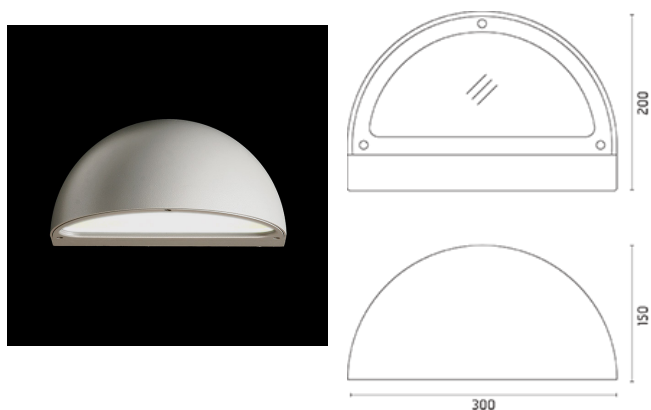

Warnings

Wall



Wall fitting



The fitting is equipped with 1 cable input



Protection against impact.
IK 07 - 02,00 joule

Bollard



The fitting is equipped with 1 cable input



Protection against impact.
IK 07 - 02,00 joule

Product Code Details

496000

Light Source



TC-DEL 2x18W G24 q-2
Electronic ballast



Light Flux, Placement



Accessories

This product has no accessories